



ELP10P3G

Starting torque and current curves

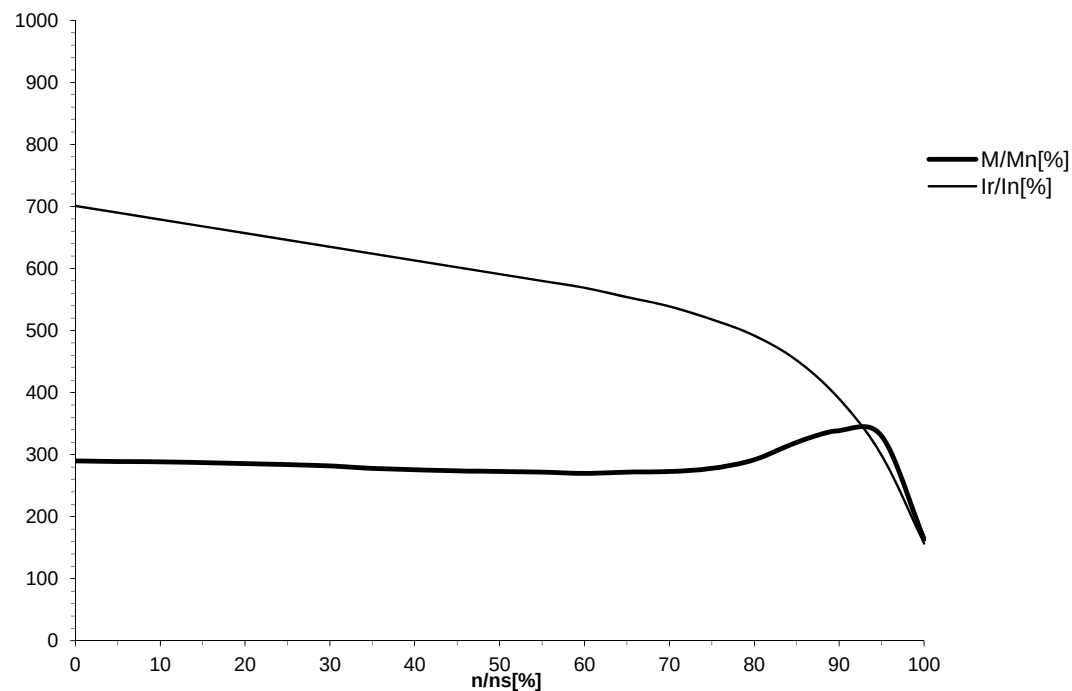


cos

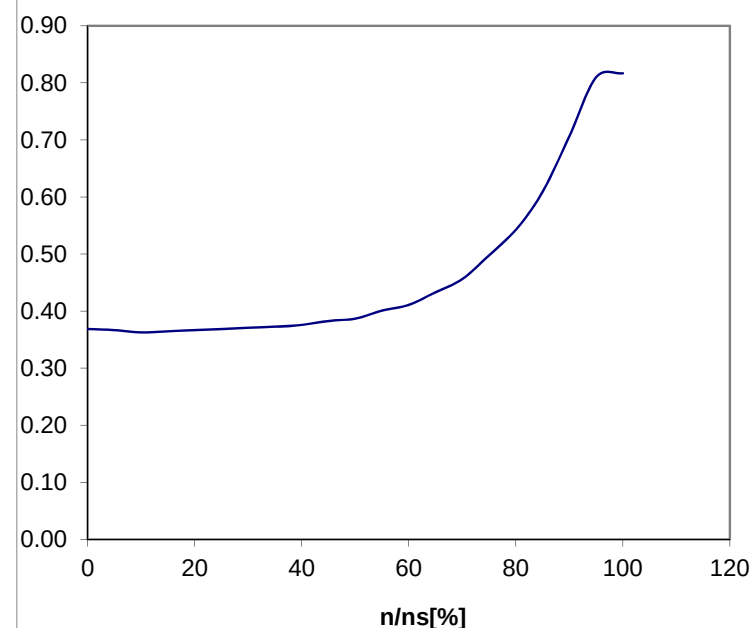

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/In[%]	701	690	679	668	657	646	635	624	613	602	591	580	569	554	539	518	492	452	390	299	157
M/Mn[%]	290	289	289	287	286	284	282	278	276	274	273	272	270	272	273	278	292	320	339	330	164
cos	0.37	0.37	0.36	0.36	0.37	0.37	0.37	0.37	0.38	0.38	0.39	0.40	0.41	0.43	0.46	0.50	0.54	0.61	0.71	0.81	0.82

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP10P3G

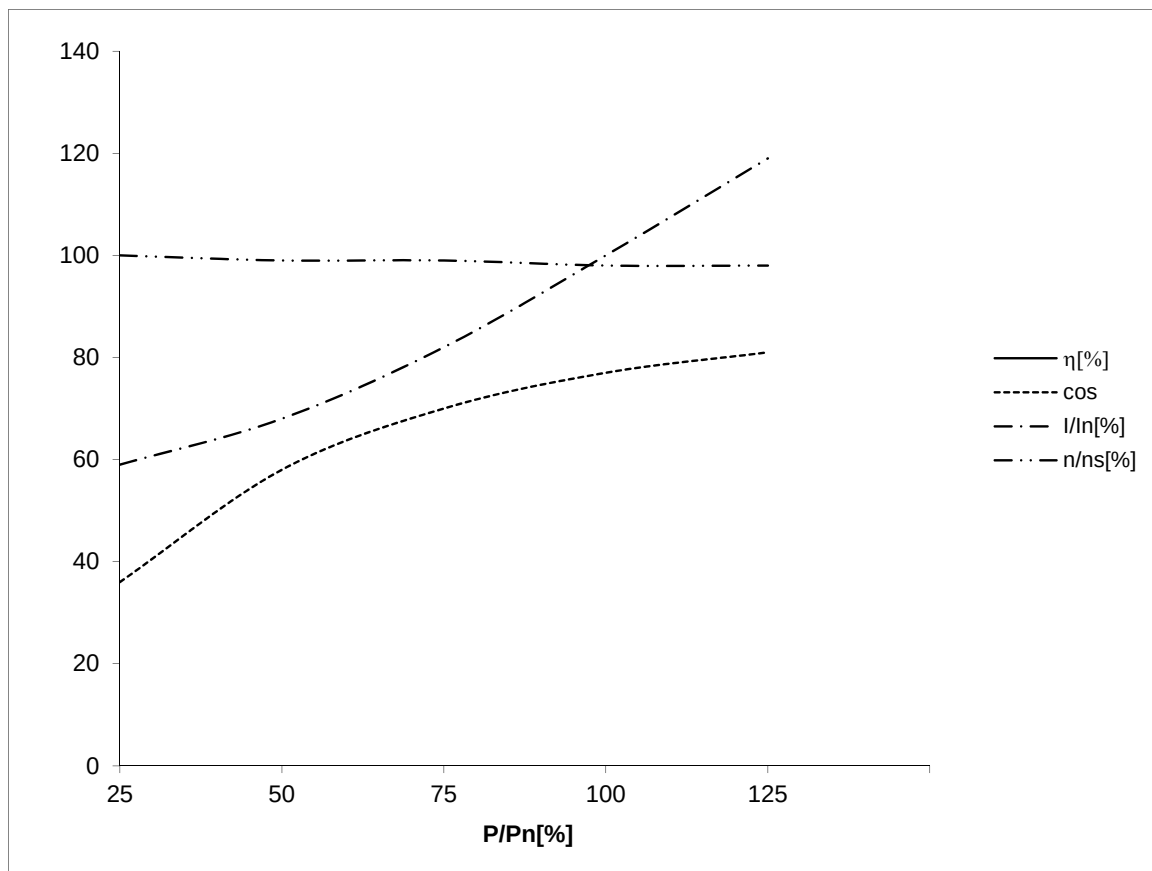

P/Pn[%]	25	50	75	100	125
η [%]	82.0	89.2	90.8	91.0	90.8
cos ϕ [%]	36	58	70	77	81
I/In[%]	59	68	82	100	119
n/ns[%]	100	99	99	98	98

Disclaimer: These Graph Datas are Typical unless noted otherwise.