

MaxMotion

PERFORMANCE DATA SHEET

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

Catalogue #: **MPR-134CH**

HP	kW	Voltage	S.F. @ 60Hz	Efficiency	Power Factor	Frame	Design	L.R. Amps
0,33	0,25	575	1,15	69,2%	0,630	56HC	B	5

60 Hz								
FLA							Code	F.L. RPM
208	230	416	460	480	575	600		
/	/	/	/	/	0,58	/	L	1750

50 Hz								
HP	kW	FLA		S.F. @ 50Hz	Efficiency	Power Factor	Code	F.L. RPM
		190	380					
/	-	/	/	/	/	/	/	/


Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
22	3	Cont.	F	40°C	1000M (3300 Ft)	39

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	69,2%	Full Load:	0,63	Full Load Ft/Lbs	1,0		
3/4 Load:	65,5%	3/4 Load:	0,53	Locked Rotor %	230		
1/2 Load:	57,7%	1/2 Load:	0,43	Break Down %	352	104,4	12

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
/	/	Steel	Rolled Steel	Aluminium Alloy		TEFC	IP55	16AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6205	6203	Sealed Bearings	Rigid	Horizontal	Black	53	/



Inverter Duty. Motor meets MG1 parts 31.4.4.2	Constant Torque Range	Variable Torque Range	Constant HP RPM
	10:1	20:1	2700

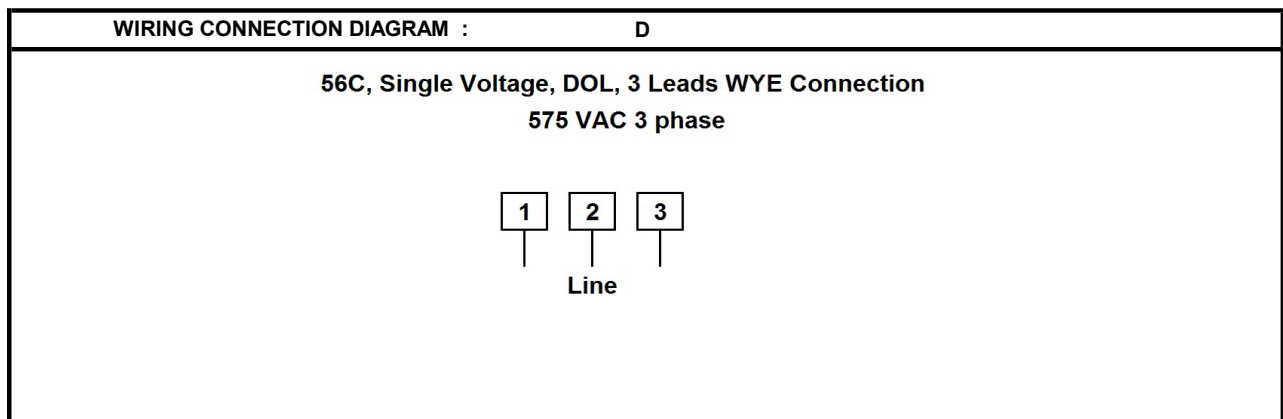

Date: 2024-05-01
Customer:
Contact:
Submittee: J.C. Lavallée

Catalogue #: MPR-134CH

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
0,33	575	1750	TEFC	56HC	60	B	4	L	F	39
	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz
Amps	0,58	0,58	0,58	0,58	0,58	0,58	0,58	0,58	0,58	0,58
RPM	0	175	437,5	875	1312,5	1750	2187,5	2625	3062,5	3500
Torq ft.lb	0,79	0,79	0,99	0,99	0,99	0,99	0,79	0,66	0,57	0,50
Peak Tq ft.lb	1,37	2,73	2,73	2,73	2,73	2,73	2,19	1,82	1,56	1,37
HP	0	0,0	0,1	0,2	0,2	0,3	0,3	0,3	0,3	0,3
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0,0	756	1440	1750	1800	Continuous	1,15	40°C	3,300 ft	53
Current (Amps)	5,0	4,3	3,0	0,6	0,5	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	2,3	1,9	3,5	1,0	0,0	C.T.	10:1	V.T.	20:1	

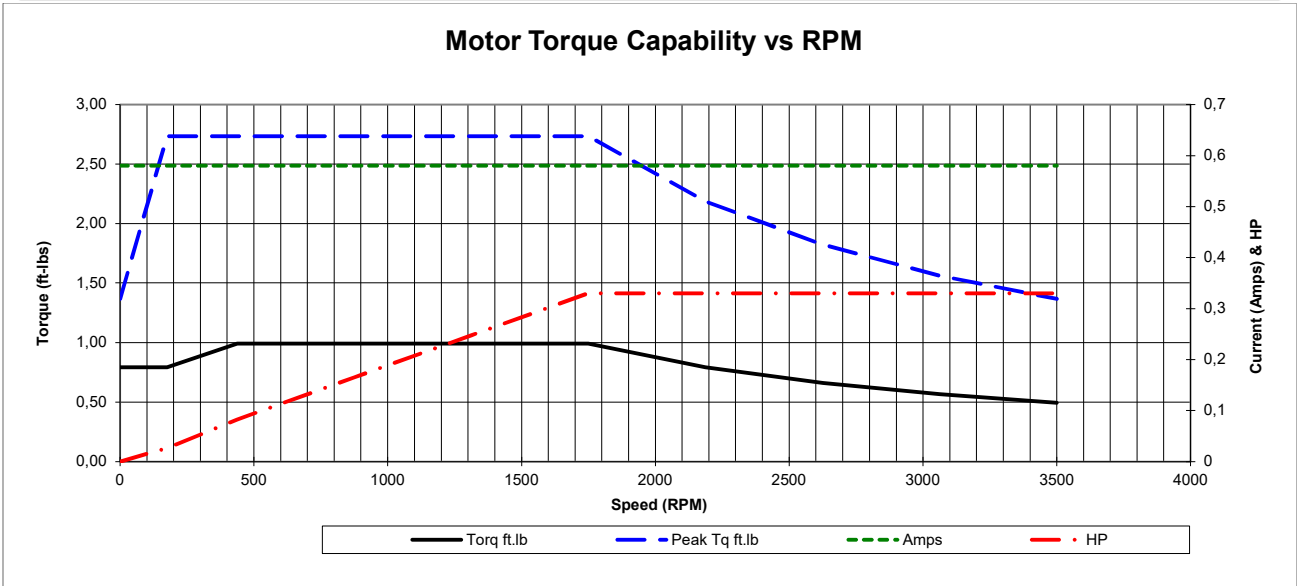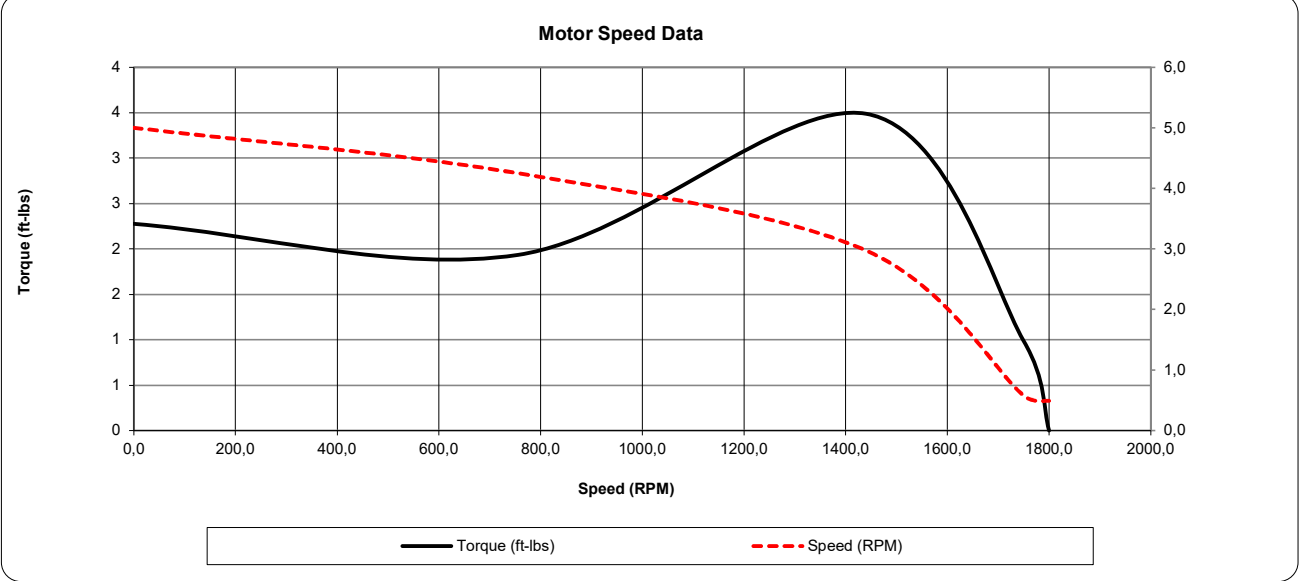




Date: 2024-05-01
Customer:
Contact:
Submittee: J.C. Lavallée

Catalogue #: MPR-134CH

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
0,33	575	1750	TEFC	56HC	60	B	4	L	F	39
Load %	0%	25%	50%	75%	100%	125%	150%			
Amps	0,49	0,50	0,51	0,54	0,58	0,73	0,87			
Torq ft/lbs	0	0,24	0,49	0,74	0,99	1,25	1,51			
RPM	0	1787,5	1775	1762,5	1750	1737,5	1725			
Eff	0	34,33	56,36	65,14	69,20	66,32	64,43			
PF	0	36,0	43	53	63,0	64,3	66,2			
Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M	
Speed (RPM)	0	756	1440	1750	1800	Continuous	1,15	40°C	3,300 ft	53
Current (Amps)	5	4,3	3,0	0,58	0,494	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	2,28	1,94	3,49	0,99	0,0	C.T.	10:1	V.T.	20:1	

Motor Speed Data

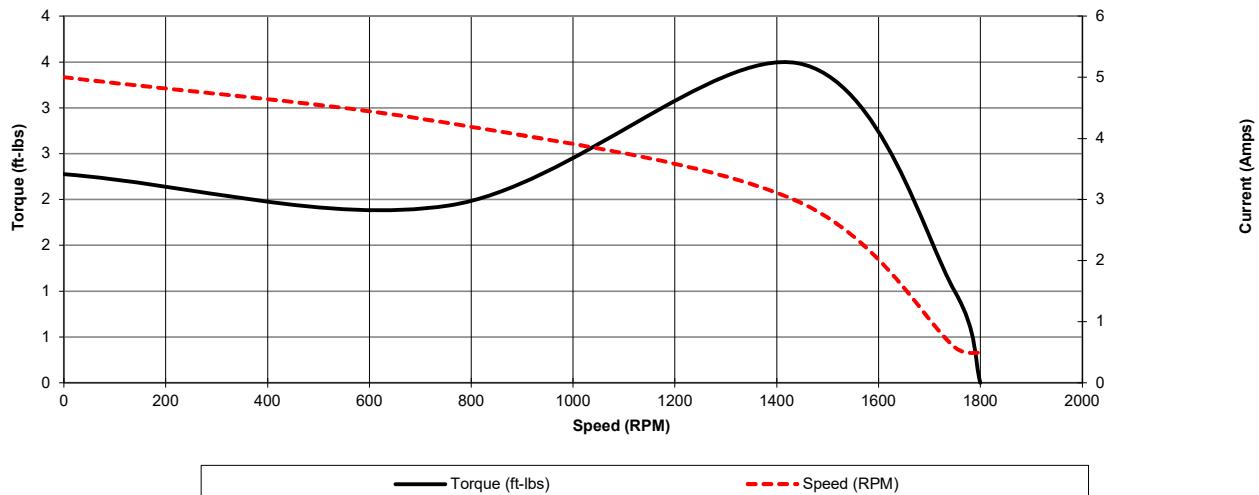

443T - 484T Dual Voltage DOL & 1 leads WYE Connection

Motor Load Data

