

MaxMotion

PERFORMANCE DATA SHEET

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

Catalogue #: **MQR-342J**

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
0,75	0,56	230 / 460	1,15	73,0%	0,810	56J	B	10

60 Hz								
FLA							Code	F.L. RPM
208	230	416	460	480	575	600		
/	2,375	/	1,1875	/	/	/	L	3455

50 Hz								
HP	kW	FLA		S.F. @ 50Hz	Efficiency	P.F.	Code	F.L. RPM
		190	380					
0,5	0,373	2,0	1,0	1,15	70,0%	0,81	L	2870

Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
22,5	3	Cont.	F	40°C	1000M (3300 Ft)	56

% Efficiency		% Power Factor			Torque			
Full Load:	73,0%	Full Load:	0,81	Full Load Ft/Lbs		1,1	Winding Resist. Ω	Safe Cold Start (Secs)
3/4 Load:	71,5%	3/4 Load:	0,71	Locked Rotor %		210		
1/2 Load:	59,1%	1/2 Load:	0,60	Break Down %		280		
						/	12	

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
/	/	304SS	Rolled Steel	Aluminium Alloy		TEFC	IP55	16AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6205	6203						
		Sealed Bearings	Rigid	Horizontal	Black	/	/

Inverter Duty. Motor meets MG1 parts 31.4.4.2	Constant Torque Range	Variable Torque Range	Constant HP RPM
	10:1	20:1	5400




Date: 2023-12-21
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: **MQR-342J**


Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
0,75	460	3455	TEFC	56J	60	B	2	L	F	56
	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz
Amps	1,1875	1,1875	1,1875	1,1875	1,1875	1,1875	1,1875	1,1875	1,1875	1,1875
RPM	0	345,5	863,75	1727,5	2591,25	3455	4318,75	5182,5	6046,25	6910
Torq ft.lb	0,91	0,91	1,14	1,14	1,14	1,14	0,91	0,76	0,65	0,57
Peak Tq ft.lb	1,37	2,74	2,74	2,74	2,74	2,74	2,19	1,82	1,56	1,37
HP	0	0,1	0,2	0,4	0,6	0,8	0,8	0,8	0,8	0,8
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0,0	1512	2880	3455	3600	Continuous	1,15	40°C	3,300 ft	/
Current (Amps)	10,0	8,5	6,0	1,2	0,8	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft.-lbs)	2,4	2,0	3,2	1,1	0,0	C.T.	10:1	V.T.	20:1	

Motor Speed Data

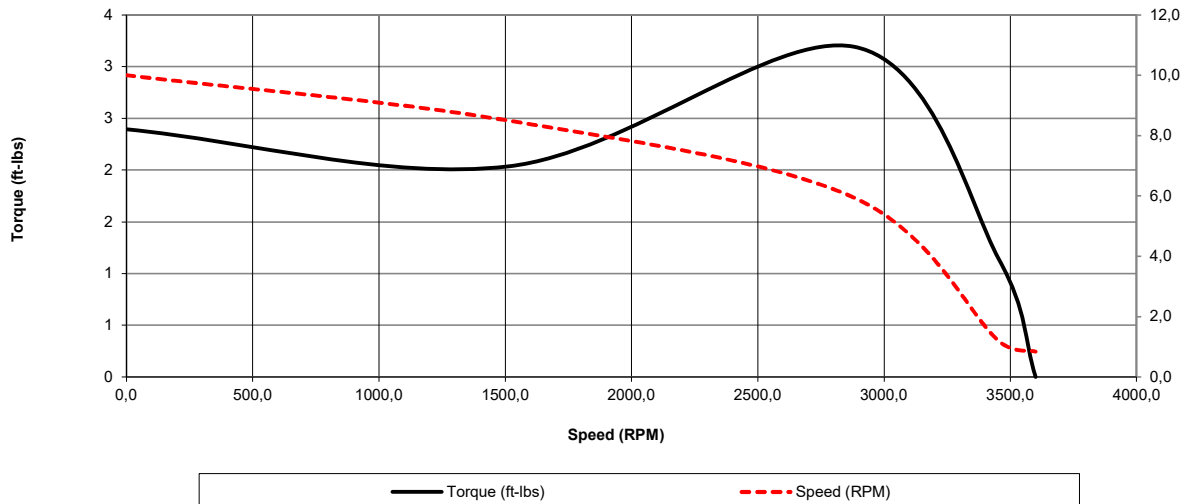

Motor Torque Capability vs RPM

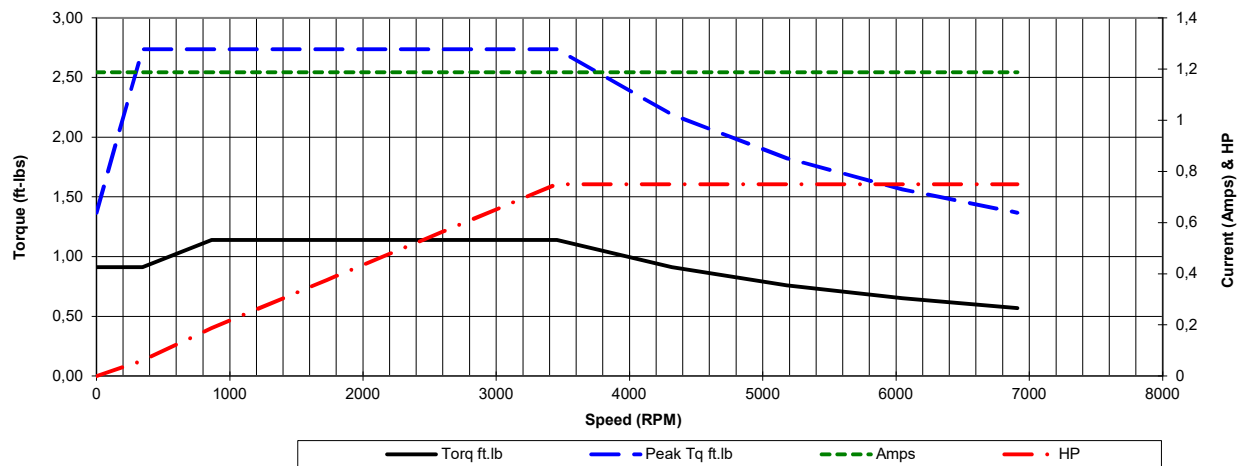



Date: 2023-12-21
Customer:
Contact:
Submittee: J.C. Lavallée

Catalogue #: MQR-342J


Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
0,75	460	3455	TEFC	56J	60	B	2	L	F	56

Load %	0%	25%	50%	75%	100%	125%	150%
Amps	0,84	0,90	0,96	1,05	1,19	1,48	1,78
Torq ft/lbs	0	0,28	0,56	0,85	1,14	1,44	1,75
RPM	0	3563,75	3527,5	3491,25	3455	3418,75	3382,5
Eff	0	38,91	60,77	70,71	73,00	71,58	69,53
PF	0	50,0	60	71,28	81,0	82,6	85,1

	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	1512	2880	3455	3600	Continuous	1,15	40°C	3,300 ft	/
Current (Amps)	10	8,5	6,0	1,1875	0,843125	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	2,39	2,04	3,19	1,14	0,0	C.T.	10:1	V.T.	20:1	

Motor Speed Data

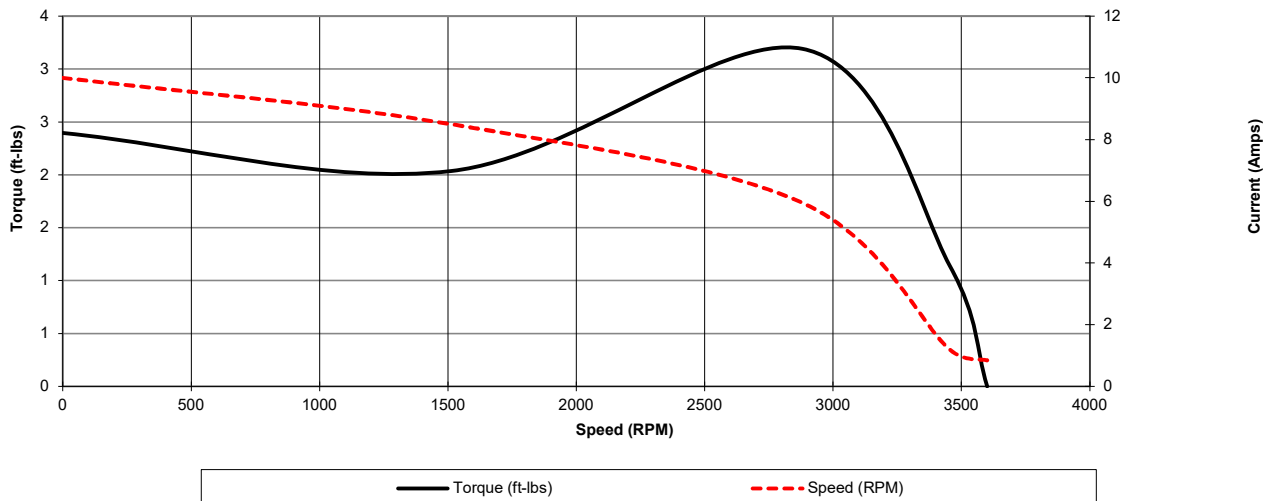

Motor Load Data

