



PERFORMANCE DATA SHEET

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

Catalogue #: **MQRP-152JH**

HP	kW	Voltage	S.F. @ 60Hz	Efficiency	Power Factor	Frame	Design	L.R. Amps
1,5	1,12	230 / 460	1,15	86,6%	0,860	56J	B	15

60 Hz								
FLA							Code	F.L. RPM
208	230	416	460	480	575	600		
/	3,81	/	1,9	/	/	/	L	3492

50 Hz								
HP	kW	FLA		S.F. @ 50Hz	Efficiency	Power Factor	Code	F.L. RPM
		190	380					
1	0,746	4,0	2,0	1,15	82,5%	0,69	L	2865


Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
28	3	Cont.	F	40°C	1000M (3300 Ft)	32

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	86,6%	Full Load:	0,86	Full Load Ft/Lbs	2,3		
3/4 Load:	86,4%	3/4 Load:	0,82	Locked Rotor %	361		
1/2 Load:	83,1%	1/2 Load:	0,71	Break Down %	406	2,19 / 8,77	12

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
/	/	304SS	Rolled Steel	Aluminium Alloy		TEFC	IP55	16AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6205	6203	Sealed Bearings	Rigid	Horizontal	Black	56	/

Inverter Duty. Motor meets MG1 parts 31.4.4.2	Constant Torque Range	Variable Torque Range	Constant HP RPM
	10:1	20:1	5400

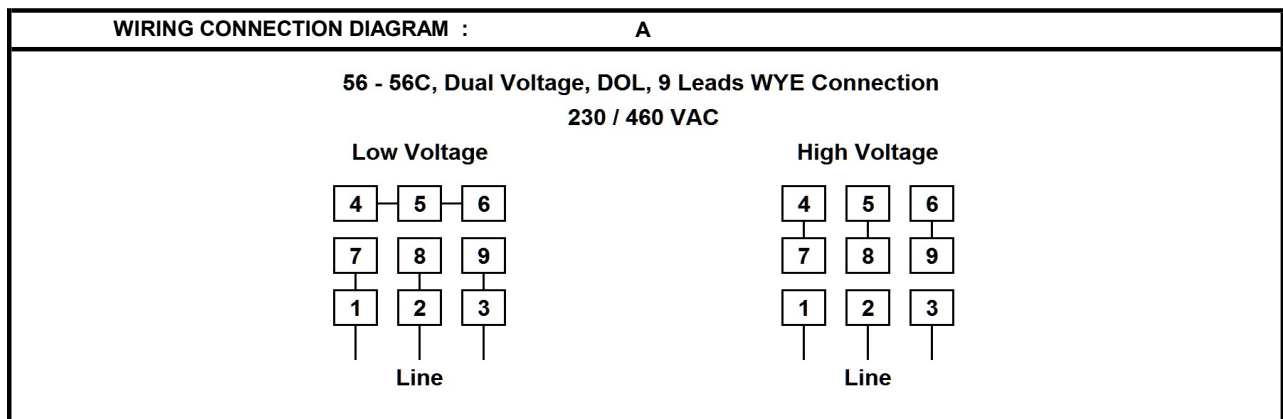


Date: 2024-05-01
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: MQRP-152JH


Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
1,5	460	3492	TEFC	56J	60	B	2	L	F	32
	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz
Amps	1,9	1,9	1,9	1,9	1,9	1,9	1,9	1,9	1,9	1,9
RPM	0	349,2	873	1746	2619	3492	4365	5238	6111	6984
Torq ft.lb	1,80	1,80	2,26	2,26	2,26	2,26	1,80	1,50	1,29	1,13
Peak Tq ft.lb	3,42	6,84	6,84	6,84	6,84	6,84	5,47	4,56	3,91	3,42
HP	0	0,1	0,4	0,8	1,1	1,5	1,5	1,5	1,5	1,5
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0,0	1512	2880	3492	3600	Continuous	1,15	40°C	3,300 ft	56
Current (Amps)	15,0	12,8	8,9	1,9	0,8	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	8,1	6,9	9,2	2,3	0,0	C.T.	10:1	V.T.	20:1	

Motor Speed Data

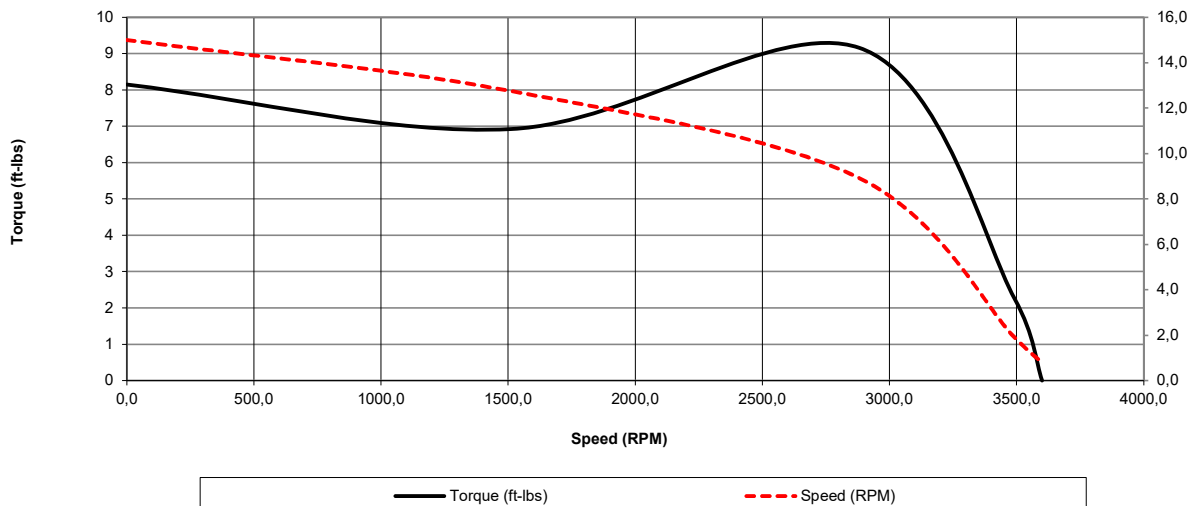

Motor Torque Capability vs RPM

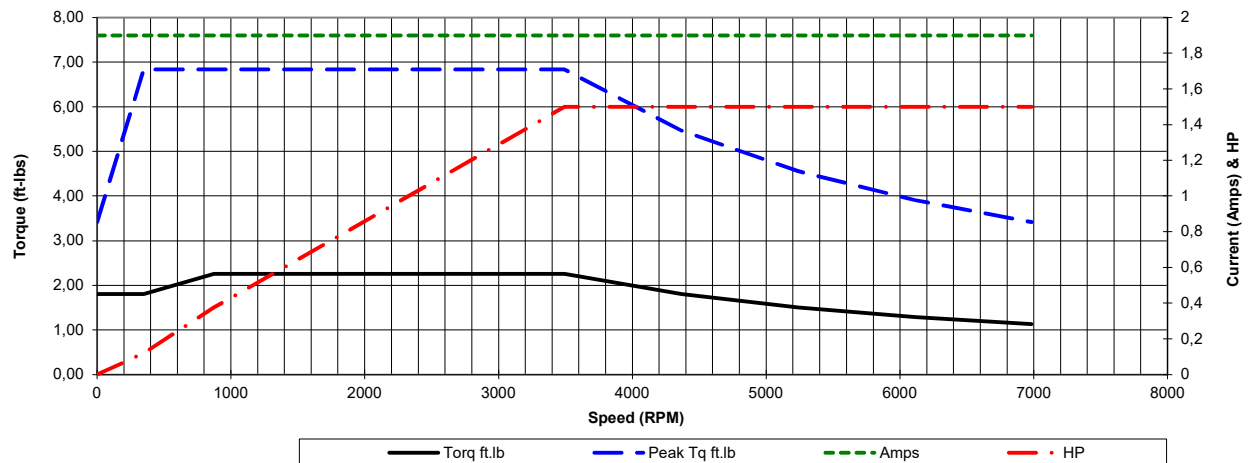




Date: 2024-05-01
Customer:
Contact:
Submittee: J.C. Lavallée

Catalogue #: MQRP-152JH

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
1,5	460	3492	TEFC	56J	60	B	2	L	F	32
Load %	0%	25%	50%	75%	100%	125%	150%			
Amps	0,80	0,98	1,20	1,54	1,90	2,38	2,85			
Torq ft/lbs	0	0,55	1,11	1,68	2,26	2,84	3,44			
RPM	0	3573	3546	3519	3492	3465	3438			
Eff	0	70,25	83,10	86,40	86,60	84,27	81,86			
PF	0	51,0	71	82	86,0	87,7	90,3			
Speed (RPM)	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	1512	2880	3492	3600	Continuous	1,15	40°C	3,300 ft	56
Current (Amps)	15	12,8	8,9	1,9	0,801	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	8,14	6,92	9,16	2,26	0,0	C.T.	10:1	V.T.	20:1	

Motor Speed Data

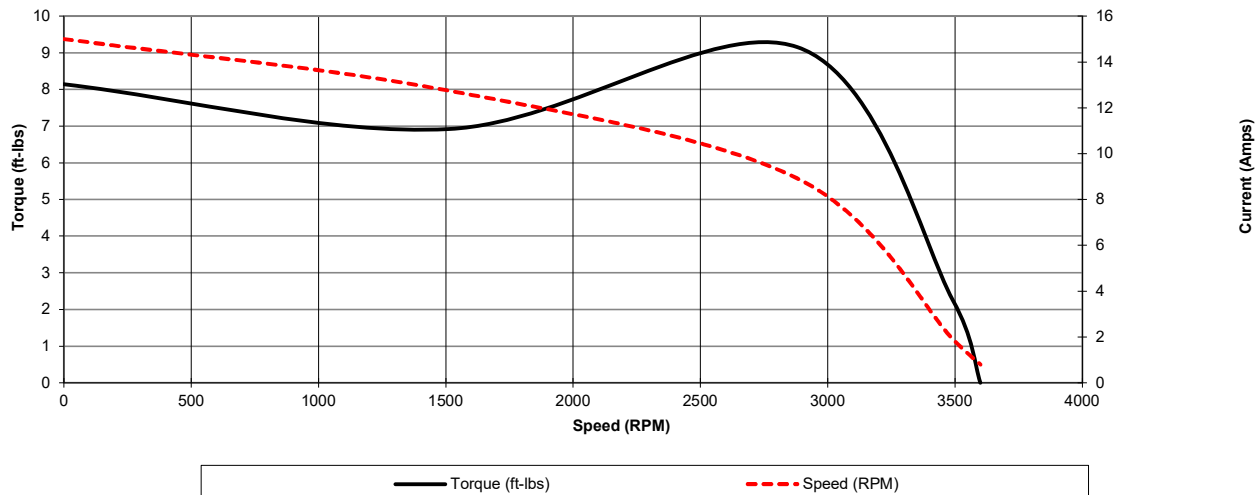

440T, 480T Dual Voltage DOL & 3 Leads WYE Connection

Motor Load Data

