
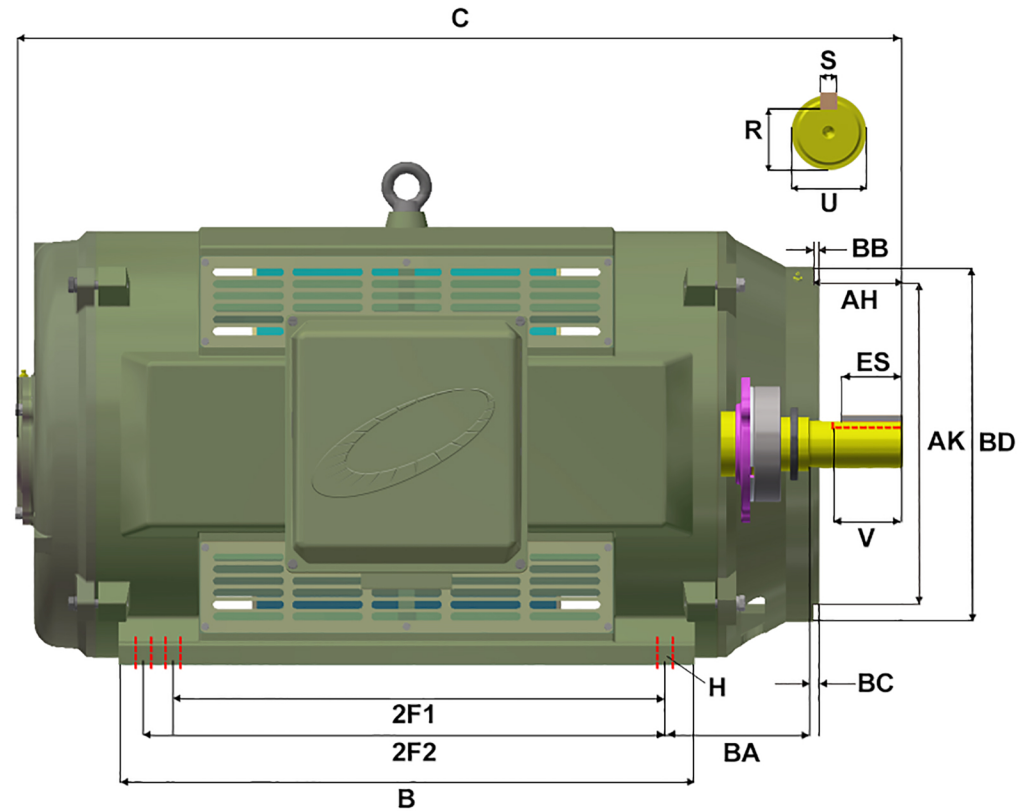


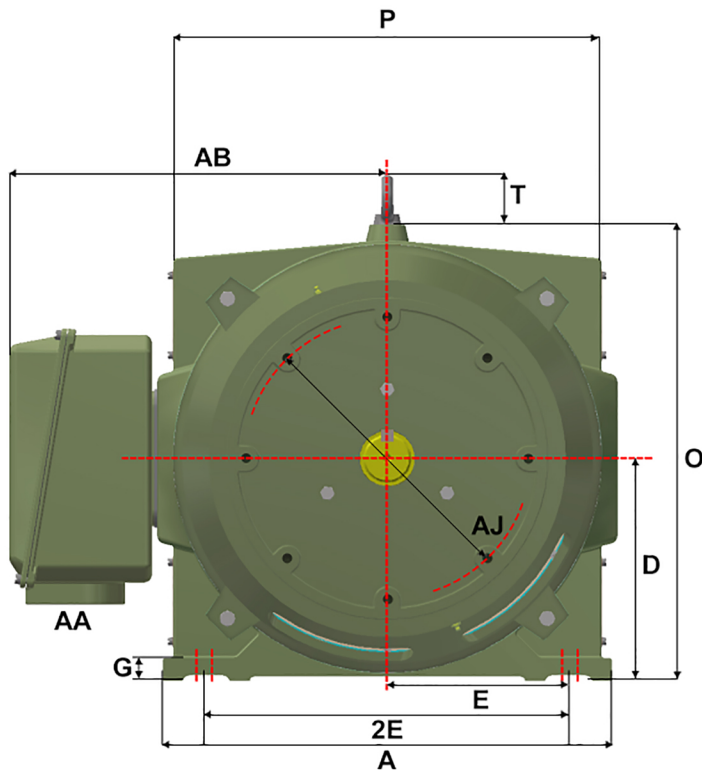

| Version: 2WTI                                                                                                        |       |       | Revised: 08-10-2019 |       |       | HP    | RPM   | FRAME | ENCLOSURE | MPOP/MQOP-81 |       |       |       |
|----------------------------------------------------------------------------------------------------------------------|-------|-------|---------------------|-------|-------|-------|-------|-------|-----------|--------------|-------|-------|-------|
| Customer is responsible in determining that Max Motion product will fit/perform suitably in the intended application |       |       |                     |       |       | 125   | 3600  | 404TS | ODP       |              |       |       |       |
| A                                                                                                                    | B     | C     | D                   | E     | 2E    | 2F1   | 2F2   | G     | H         | O            | P     | R     | S     |
| 19.10                                                                                                                | 17.00 | 30.30 | 10.00               | 8.00  | 16.00 | 12.25 | 13.75 | 1.15  | 6 X 0.81  | 21.00        | 20.25 | 1.845 | 0.500 |
| T                                                                                                                    | U     | V     | AA                  | AB    | AH    | AJ    | AK    | BA    | BB        | BC           | BD    | ES    |       |
| 2.60                                                                                                                 | 2.125 | 4.25  | 3.00                | 14.50 | 4.00  | 11.00 | 12.50 | 6.63  | 0.25      | 0.25         | 15.50 | 2.78  |       |