
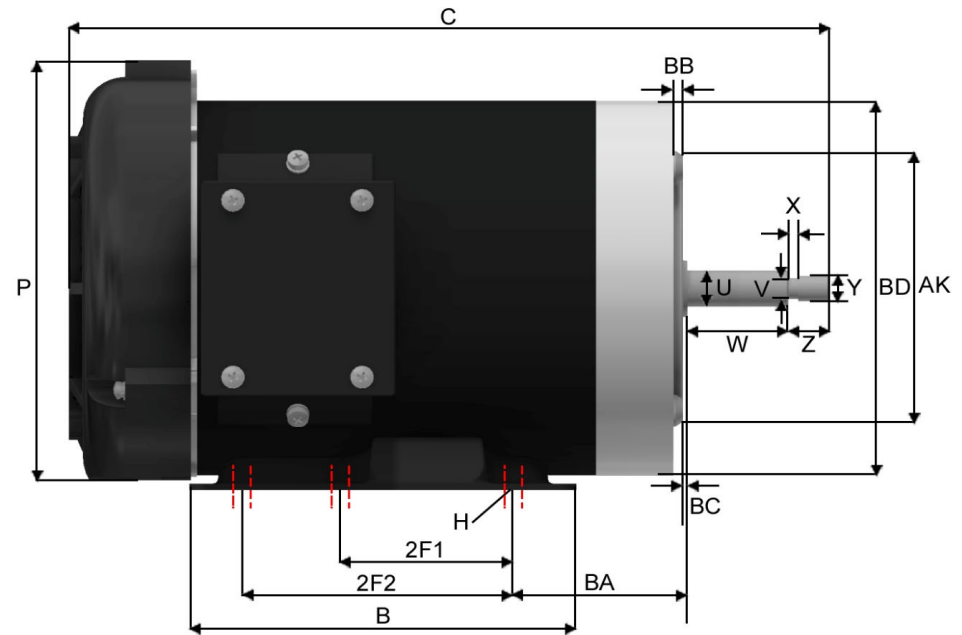


# MaxMotion

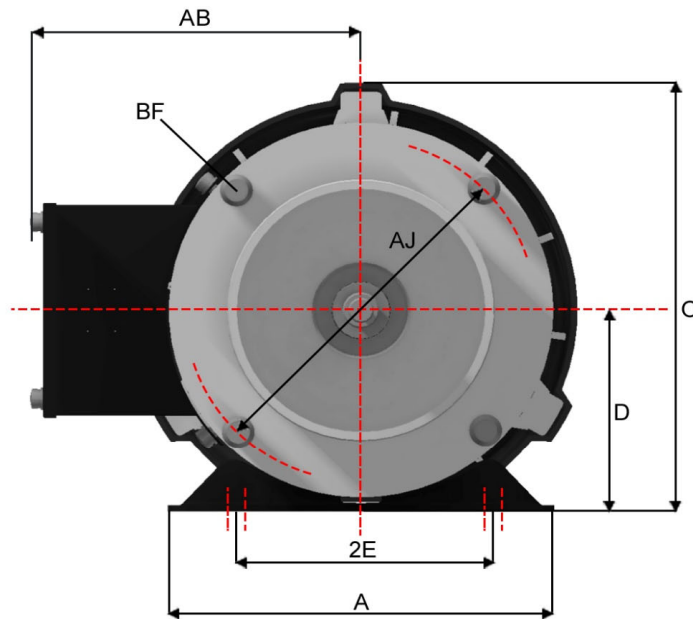

|                                                                                                               |      |       |                     |       |      |      |      |       |           |              |             |       |       |
|---------------------------------------------------------------------------------------------------------------|------|-------|---------------------|-------|------|------|------|-------|-----------|--------------|-------------|-------|-------|
| Version: 1WTI                                                                                                 |      |       | Revised: 20-04-2020 |       |      | HP   | RPM  | FRAME | ENCLOSURE | MPR/MQR-122J |             |       |       |
| Customer is responsible in determining that MEP product will fit/perform suitably in the intended application |      |       |                     |       |      | 1/2  | 3450 | 56J   | TEFC      |              |             |       |       |
| A                                                                                                             | B    | C     | D                   | 2E    | 2F1  | 2F2  | H    | O     | P         | U            | V           | W     | X     |
| 6.5                                                                                                           | 6.50 | 12.88 | 3.50                | 4.88  | 3.00 | 5.00 | 0.34 | 7.44  | 7.25      | 0.625        | 0.372-0.362 | 1.693 | 0.118 |
| Y                                                                                                             |      | Z     | AB                  | AJ    | AK   | BA   | BB   | BC    | BD        | BF           |             |       |       |
| 7/16-20 UNF-2A R H                                                                                            |      | 0.689 | 5.47                | 5.875 | 4.50 | 2.75 | 0.16 | 0.031 | 6.45      | 4*3/8-16     |             |       |       |