



ASIA
DELTA ELECTRONICS, INC.
Taoyuan Plant/
31-1, SHIEN PAN ROAD, KUEI SAN
INDUSTRIAL ZONE, TAOYUAN SHIEN,
TAIWAN, R.O.C.
TEL: 886-3-362-6301
FAX: 886-3-362-7267

NORTH/SOUTH AMERICA
DELTA PRODUCTS CORPORATION
Sales Office/
P.O. BOX 12173
5101 DAVIS DRIVE
RESEARCH TRIANGLE PARK,
NC 27709, U.S.A.
TEL: 1-919-767-3813
FAX: 1-919-767-3969

EUROPE
DELTRONICS (NETHERLANDS) B.V.
DE WITBOGT 15
NL-5652 AG EINDHOVEN
THE NETHERLANDS
TEL: 31-40 259-2850
FAX: 31-40 259-2851

DELTA ELECTRONICS (JAPAN) INC.
DELTA SHIBADAIMON BLDG.
2-1-14 SHIBADAIMON, MINATO-KU,
TOKYO, 105-0012, JAPAN
TEL: 81-3-5733-1111
FAX: 81-3-5733-1211

*We reserve the right to change the information in this catalogue without prior notice

20060124AMD-EE



VFD-e

DELTA VFD-e Series
High Performance/Flexible Extension/
Micro Type AC Motor Drives



www.delta.com.tw/industrialautomation

Variable Speed AC Motor Drive

VFD-e Series



Features


High Performance
Flexible Extension
Micro Type AC Motor Drives

• Power Range

1 phase 115V series: 0.2~0.75kW (0.25~1hp)
1 phase 230V series: 0.2~2.2kW (0.25~3hp)
3 phase 230V series: 0.2~7.5kW (0.25~10hp)
3 phase 460V series: 0.4~11kW (0.50~15hp)

• Built-in PLC Function

Easy to write PLC program without additional PLC

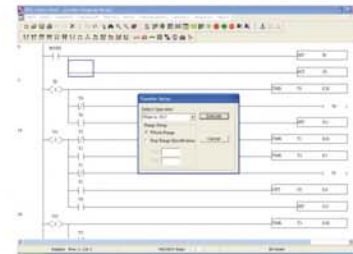

• Side-by-side Installation(40°C)

High-efficiency cooling and flexible space



• Easy Maintenance

Removable cooling fan for easy maintenance



Features

• Modular Design

Modular structure and extension with optional cards

• Standard MODBUS Protocol

Standard MODBUS Protocol via RS-485

• Built-in EMI Filter (230V 1 phase and 460V 3 phase)

To reduce electromagnetic interference efficiently

• Compact Design

Space saving and easy DIN rail mounting with optional DIN rail adapter

• Optional Fieldbus Modules

Provide connection to a variety of networks, including Profibus, DeviceNet, LonWorks and CANopen (under development)

• Flexible Extension

Via optional cards, such as I/O card, Relay card, PG (Encoder) card and USB card, to meet your application requirements



• RFI-Switch for IT Mains

Removable "Y" capacitor for use on IT mains supplies

• Easy DC BUS Sharing

Multiple VFD-E can be connected in parallel to share the regenerative braking energy. In this way, over-voltage is prevented and the DC-bus voltage stabilized.

• Comply with RoHS

New lead-free manufacturing process

• Complete Protection Function

High precision current detection, full overload protection (oL, oL1 and oL2), over-voltage/over-current stall prevention, short-circuit protection, reset after fault, speed search function and motor overheat protection by PTC.

• Removable Keypad


The standard keypad acts as status monitor. More functions, including parameter modification, RUN/STOP, speed change, and status display, via optional keypad




Variable Speed AC Motor Drive

Basic Wiring Diagram

VFP-e

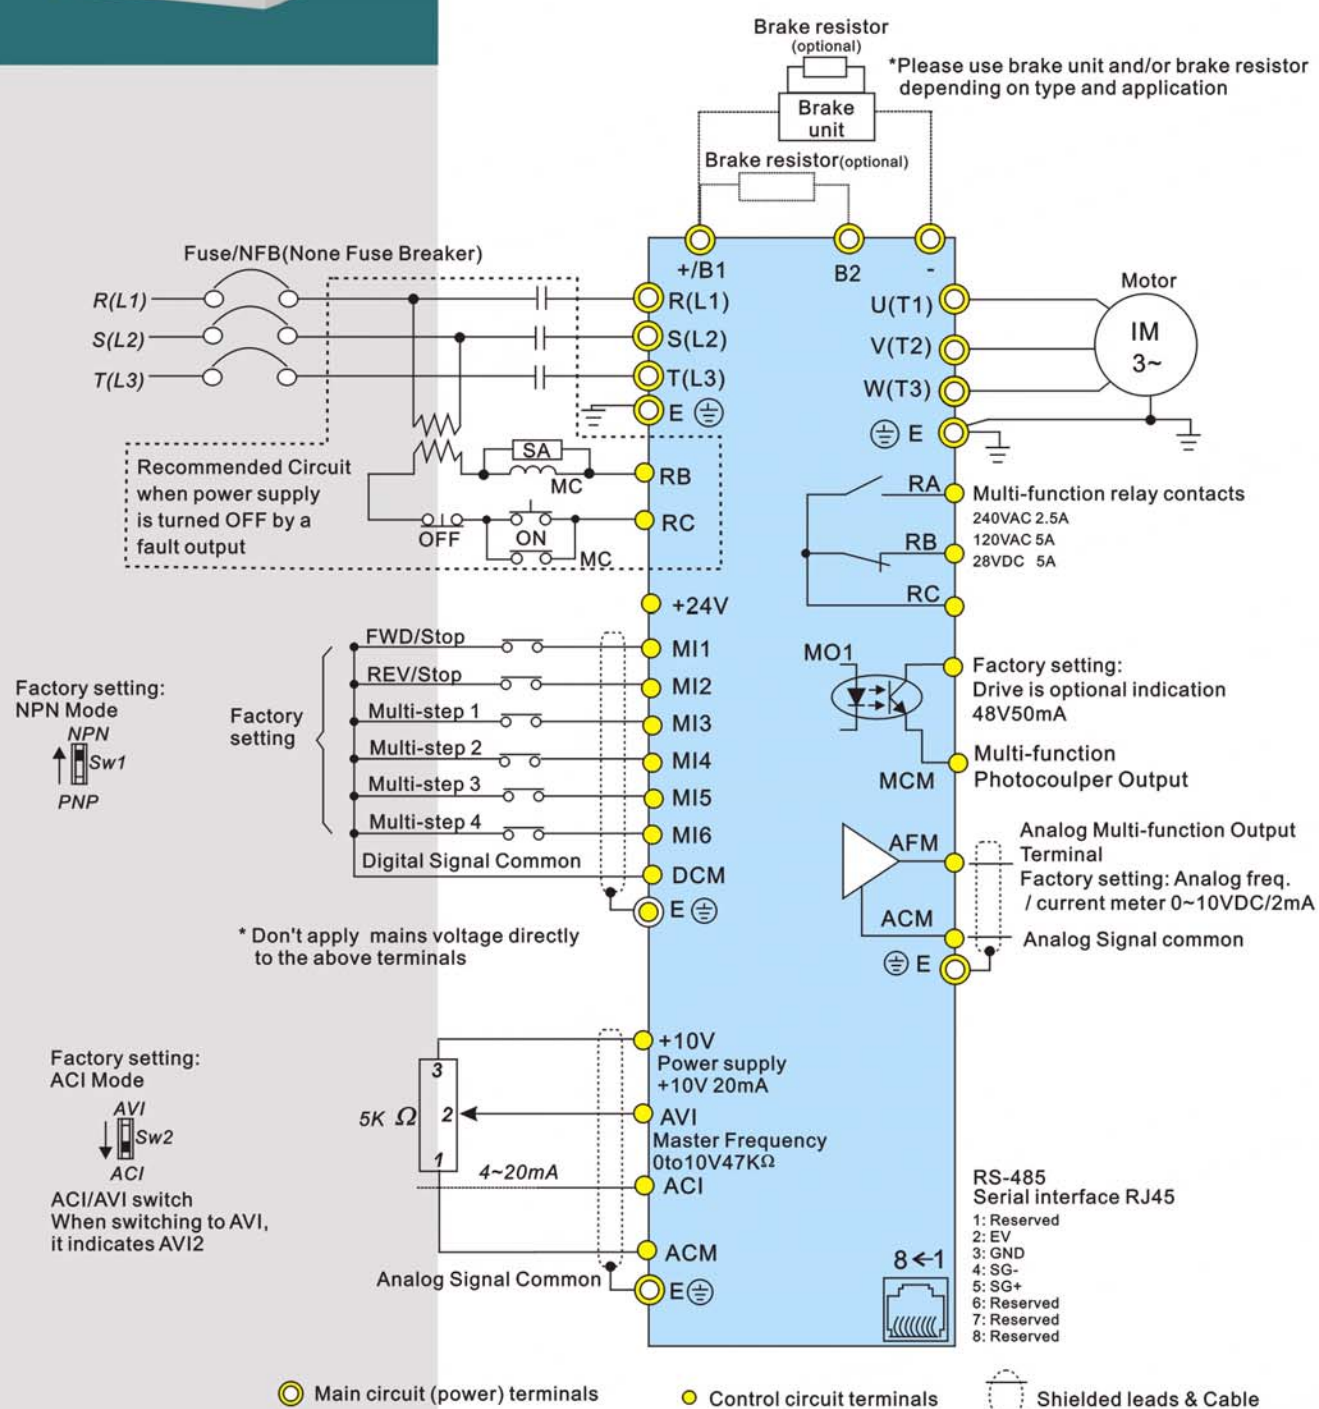


- External Parts

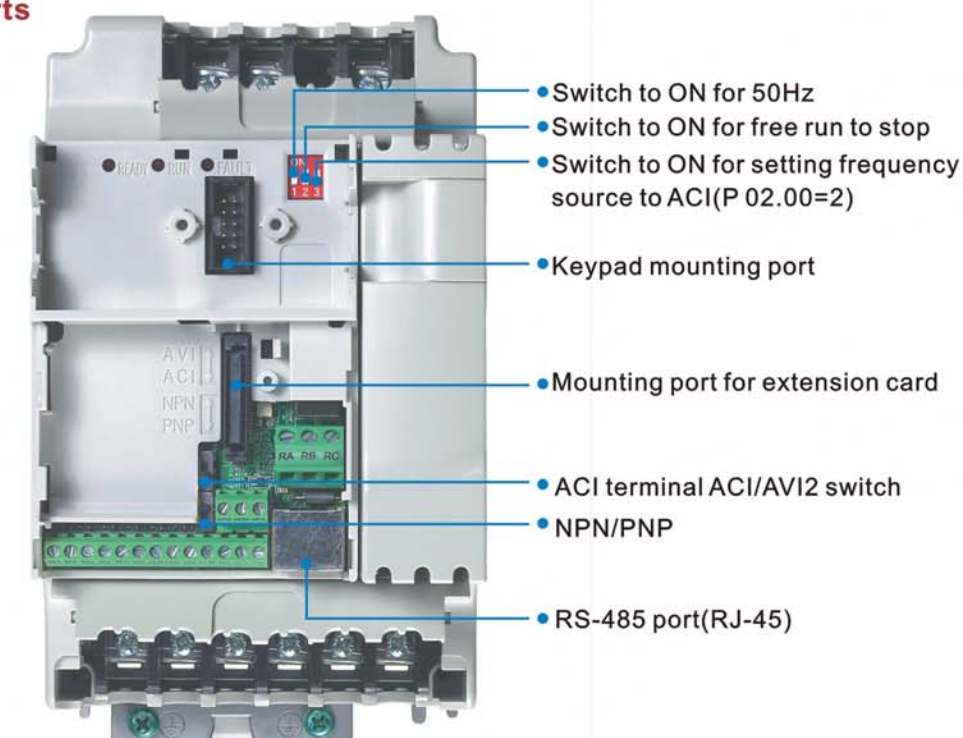

- **Control Terminals**



- **Model Explanation**

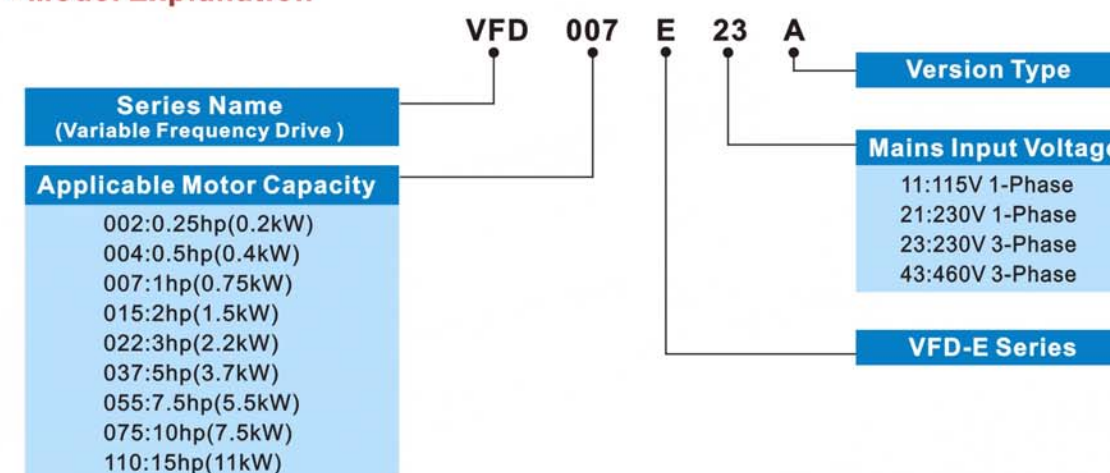



Variable Speed AC Motor Drive

VFD-e

VFD-e Applications

Conveyor and Transportation Machinery

- Conveyor belt
- Automatic doors
- Roller door
- Small elevator
- Escalator
- Parking device
- X-Y axis of traveling crane

Food Processing


- Dumpling maker
- Food stirrer
- Noodle maker

Machine Tool/Metal Processing Machinery

- Grinder
- Drill
- Small lathe
- Milling machines
- Injection molding (clamp)

Wood Working Machinery

- 4 side planer
- Woodcarver
- Wood working machine
- Simple cutting machine for wood working
- Spraying machine

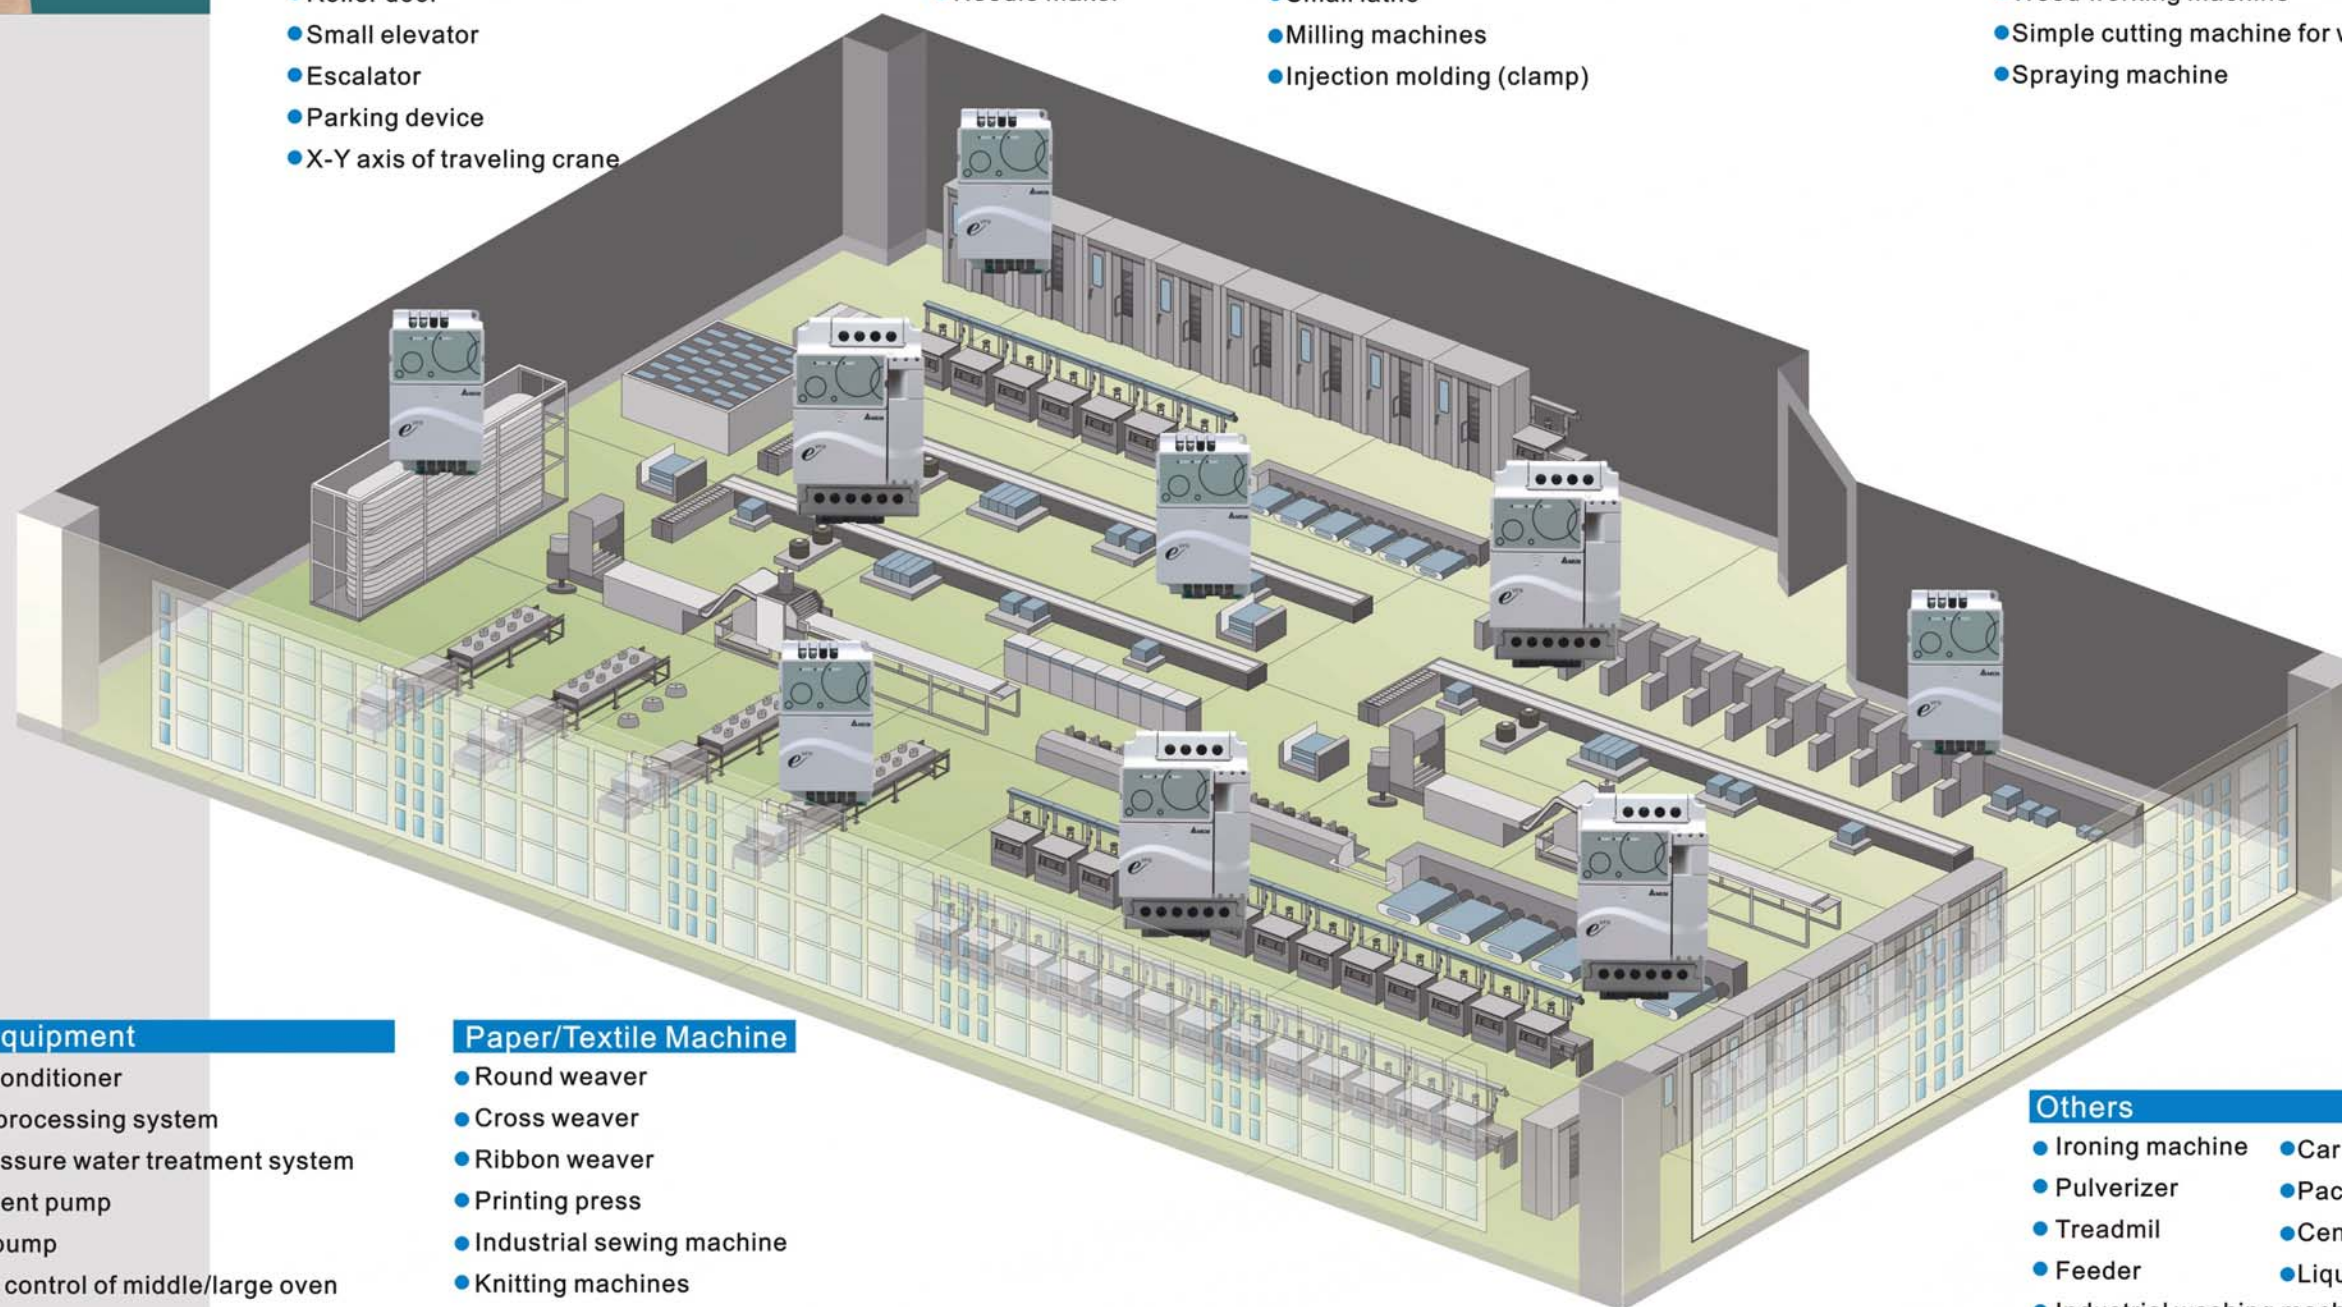

Fan/Pump Equipment

- Building air conditioner
- Wastewater processing system
- Constant pressure water treatment system
- Water treatment pump
- Agricultural pump
- Temperature control of middle/large oven
- Air compressor
- Heat exchange fans
- Building water dispenser system
- Dryer's windmill

Paper/Textile Machine

- Round weaver
- Cross weaver
- Ribbon weaver
- Printing press
- Industrial sewing machine
- Knitting machines

Others

- Ironing machine
- Car washing machine
- Pulverizer
- Packing machine
- Treadmill
- Centrifuge
- Feeder
- Liquid mixer
- Industrial washing machine



Variable Speed AC Motor Drive

Specifications



Voltage Class		115V Class		
Model Number	VFD-___E	002	004	007
Max. Applicable Motor Output (kW)		0.2	0.4	0.75
Max. Applicable Motor Output (hp)		0.25	0.5	1.0
Output Rating	Rated Output Capacity (kVA)	0.6	1.0	1.6
	Rated Output Current (A)	1.6	2.5	4.2
	Maximum Output Voltage (V)	3-phase proportional to twice the input voltage		
	Output Frequency (Hz)	0.1~400Hz		
	Carrier Frequency (kHz)	1-15		
Input Rating	Rated Input Current (A)	Single-phase		
		6	9	18
	Rated Voltage/Frequency	Single phase 100-120V · 50/60Hz		
	Voltage Tolerance	±10%(90-132V)		
	Frequency Tolerance	±5%(47-63Hz)		
Cooling Method		Natural Cooling		Fan Cooling
Weight (kg)		1.2	1.2	1.2

Voltage Class		230V							
Model Number VFD-___E		002	004	007	015	022	037	055	075
Max. Applicable Motor Output (kW)		0.2	0.4	0.75	1.5	2.2	3.7	5.5	7.5
Max. Applicable Motor Output (hp)		0.25	0.5	1.0	2.0	3.0	5.0	7.5	10.0
Output Rating	Rated Output Capacity (kVA)	0.6	1.0	1.6	2.9	4.2	6.5	9.5	12.5
	Rated Output Current (A)	1.6	2.5	4.2	7.5	11.0	17.0	25.0	33.0
	Maximum Output Voltage (V)	3-phase proportional to input voltage							
	Output Frequency (Hz)	0.1~400Hz							
	Carrier Frequency (kHz)	1-15							
Input Rating	Rated Input Current (A)	Single/3-phase					3-phase		
		4.9/1.9	6.5/2.7	9.7/5.1	15.7/9	24/15	20.6	26	34
	Rated Voltage/Frequency	Single/3-phase 200-240V・50/60Hz					3-phase 200-240V・50/60Hz		
	Voltage Tolerance	±10%(180-264V)							
	Frequency Tolerance	±5%(47-63Hz)							
Cooling Method		Natural Cooling			Fan Cooling				
Weight (kg)		1.1	1.1	1.1	1.9	1.9	1.9	3.5	3.5

Voltage Class		460V							
Model Number	VFD-___E	004	007	015	022	037	055	075	110
Max. Applicable Motor Output (kW)		0.4	0.75	1.5	2.2	3.7	5.5	7.5	11.0
Max. Applicable Motor Output (hp)		0.5	1.0	2.0	3.0	5.0	7.5	10.0	15.0
Output Rating	Rated Output Capacity (kVA)	1.2	2.0	3.3	4.4	6.8	9.9	13.7	18.3
	Rated Output Current (A)	1.5	2.5	4.2	5.5	8.2	13.0	18.0	24.0
	Maximum Output Voltage (V)	3-phase proportional to input voltage							
	Output Frequency (Hz)	0.1~400Hz							
	Carrier Frequency (kHz)	1-15							
Input Rating	Rated Input Current (A)	3-phase							
		1.9	3.2	4.31	7.1	11.2	14	19	26
	Rated Voltage/Frequency	3-phase 380-480V · 50/60Hz							
	Voltage Tolerance	±10%(342-528V)							
	Frequency Tolerance	±5%(47-63Hz)							
Cooling Method		Natural Cooling				Fan Cooling			
Weight (kg)		1.2	1.2	1.2	1.9	1.9	4.2	4.2	4.2

Control Characteristics	Control System	SPWM (Sinusoidal Pulse Width Modulation) Control (V/f or sensorless vector control)	
	Frequency Setting Resolution	0.01Hz	
	Output Frequency Resolution	0.01Hz	
	Torque Characteristics	Including the auto-torque/auto-slip compensation; starting torque can be 150% at 5.0Hz	
	Overload Endurance	150% of rated current for 1 minute	
	Skip Frequency	Three zones, setting range 0.1~400Hz	
	Accel/Decel Time	0.1to 600 seconds (2 Independent setting of Accel/Decel time)	
	Stall Prevention Level	Setting 20to 250% of rated current	
	DC Braking	Operation frequency 0.1~400.0Hz, output 0~100% rated current Start time 0~60 seconds, stop time 0~60 seconds	
	Regenerated Braking Torque	Approx. 20% (up to 125% possible with optional brake resistor or externally mounted brake unit. 1-15hp models have brake chopper built-in)	
Operating Characteristics	V/f Pattern	Adjustable V/f pattern	
	Frequency Setting	Keypad	Setting by ▲▼
		External Signal	Potentiometer-5kΩ/0.5W, 0 to +10VDC, 4 to 20mA, RS-485 interface; Multi-function Inputs 3 to 9 (15 steps, Jog, up/down)
	Operation Setting Signal	Keypad	Set by RUN and STOP
		External Signal	2 wires/3 wires (FWD, REV, EF), JOG operation, RS-485 serial interface (MODBUS), programmable logic controller
	Multi-Function Input Signal	Multi-step selection 0 to 15, Jog, accel/decel inhibit, 2 accel/decel switches, counter, external Base Block (NC, NO), auxiliary motor control is invalid, ACI/AVI/AUI selections, driver reset, UP/DOWN key settings, sink/source (=NPN/PNP) selection	
	Multi-Function Output Indication	AC drive operating, frequency attained, non-zero frequency, Base Block, fault indication, local/remote indication, auxiliary motor output, drive is ready, overheat alarm, emergency stop and status selections of input terminals (NC/NO)	
	Analog Output Signal	Output frequency/current/voltage/frequency command/speed/factor	
	Alarm Output Contact	Contact will be On when drive malfunctions (1 Form C/change-over contact or 1 open collector output)	
	Operation Functions	Built-in PLC, AVR, accel/decel S-Curve, over-voltage/over-current stall prevention, 5 fault records, reverse inhibition, momentary power loss restart, DC braking, auto torque/slip compensation, auto tuning, adjustable carrier frequency, output frequency limits, parameter lock/reset, vector control, PID control, fan & pump control, external counter, MODBUS communication, abnormal reset, abnormal re-start, power-saving, sleep/wake function, digital frequency output, fan control, sleep/wake frequency, master/auxiliary frequency, 1st/2nd frequency source selections, 1st/2nd frequency source combination, NPN/PNP selection	
Environmental Conditions	Protection Functions	Over voltage, over current, under voltage, under current, external fault, overload, ground fault, overheating, electronic thermal, IGBT short circuit, PTC	
	Display Keypad	6-key, 7-segment LED with 4-digit, 5 status LED, master frequency, output frequency, output current, custom units, parameter values for setup and lock, faults, RUN, STOP, RESET, FWD/REV, JOG, PLC	
	Enclosure Rating	IP20	
	Pollution Degree	2	
	Installation Location	Altitude 1,000 m or lower, keep from corrosive gasses, liquid and dust	
	Ambient Temperature	-10°C to + 50°C (40°C for side-by-side mounting) Non-Condensing and not frozen	
	Storage/Transportation Temperature	-20°C to 60°C	
	Ambient Humidity	Below 90% RH (non-condensing)	
	Vibration	9.80665m/s ² (1G) less than 20Hz, 5.88m/s ² (0.6G) at 20 to 50Hz	
	Approvals		






Variable Speed AC Motor Drive

Dimensions & Options

VFD-e

Dimensions

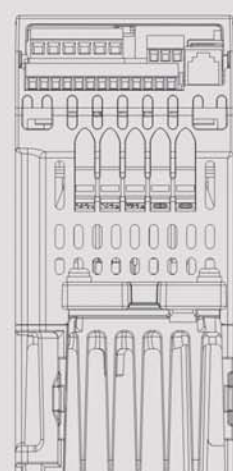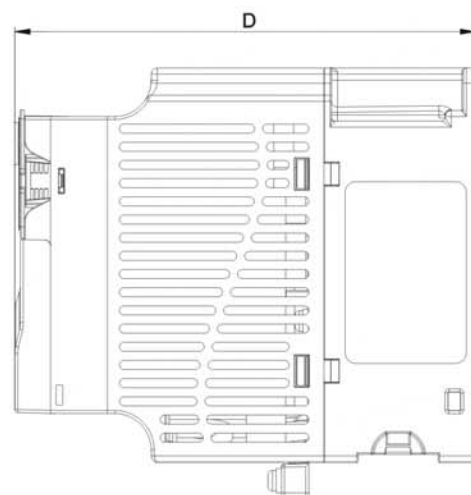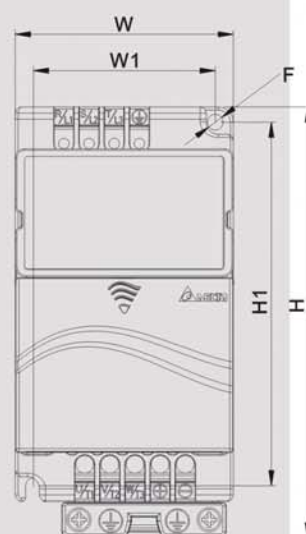

Unit: mm(inch)

Model	W	W1	H	H1	D	F
VFD002E11A VFD002E21A VFD002E23A VFD004E11A VFD004E21A VFD004E23A VFD004E43A VFD007E21A VFD007E23A VFD007E43A VFD015E23A VFD015E43A	72.0 (2.83)	60.0 (2.36)	142.0 (5.59)	120.0 (4.72)	152.0 (5.98)	5.2 (0.20)
VFD007E11A VFD015E21A VFD022E21A VFD022E23A VFD022E43A VFD037E23A VFD037E43A	100.0 (3.94)	89.0 (3.51)	174.0 (6.86)	162.0 (6.38)	152.0 (5.99)	5.5 (0.22)
VFD055E23A VFD055E43A VFD075E23A VFD075E43A VFD110E43A	130.0 (5.12)	116.0 (4.57)	260.0 (10.24)	246.5 (9.71)	169.2 (6.67)	5.5 (0.22)

Accessories

Optional Cards



■ EME-R3AA
Relay card (3 form A/
NO contacts)



■ EME-R2CA
Relay card (2 form C/
Change-over contacts)



■ EME-33A
I/O card
(photocoupler 3in+3out)



■ EME-A22A
A/D, D/A card (12 bits)
(under development)



■ EME-PG01
PG card
(under development)

■ CME-USB01
Second communication card
(USB1.1) (under development)

Fieldbus Modules

- DeviceNet
- Profibus
- LonWorks
- CANopen (under development)

Others

- Zero phase reactor
- AC reactor
- DIN rail adapter
- Brake unit (under development)
- Grounding plate
- Keypad for communication (PU-06)
- DC Fan



■ Digital keypad (KPE-LE01)



■ Keypad cable



■ EMI Input Filter
(under development)



■ Brake resistor