

PERFORMANCE DATA SHEET EPACT NR CAN NEMA 12 - 11

Catalogue #: **JMQ-61**

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
50	37.30	230/460	1.15	92.4%	0.9	326JM	B	362

60 Hz								
FLA							Code	F.L. RPM
208	230	416	460	480	575	600		
117	110	58.5	55	52.7	/	/	G	3545

50 Hz								
FLA			S.F. @ 50Hz		Efficiency	Power Factor	Code	F.L. RPM
190	380	415						
137.0	68.5	62.7	1.00		90.7%	0.91	F	2930

Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
532	3	Cont.	F	40°C	1000M (3300 Ft)	70

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	92.4%	Full Load:	0.90	Full Load Ft/Lbs	73.9		
3/4 Load:	93.1%	3/4 Load:	0.88	Locked Rotor %	200		
1/2 Load:	92.5%	1/2 Load:	0.81	Break Down %	270	0.14	20


Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
3.32	63.7	Standard	Cast Iron	Standard	Standard	TEFC	IP55	8AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6312	6312	Mobil PolyrexEm	Rigid	Horizontal	Blue	89	100

Inverter Duty. Motor meets MG1 parts 31.4.4.2	Constant Torque Range	Variable Torque Range	Constant HP RPM
	2:1	10:1	5400


WIRING CONNECTION DIAGRAM : **B**

213T - 405T, Dual Voltage, 12 Leads Connection
230 / 460 VAC 3 phase

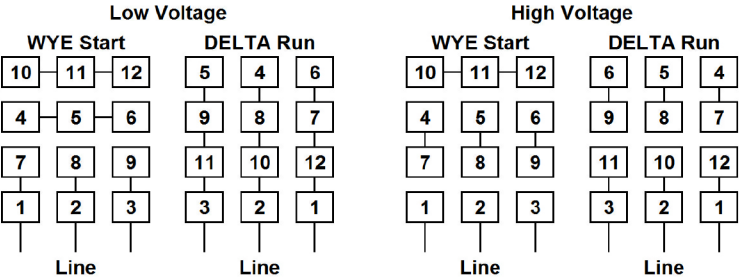


EPACT NR CAN NEMA 12 - 11										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
50	460	3545	TEFC	326JM	60	B	2	G	F	70
Load %	0%	25%	50%	75%	100%	125%	150%			
Amps	15.00	20.36	30.80	42.75	55.00	70.61	85.20			
Torq ft/lbs	0	18.16	36.44	54.88	73.46	92.20	111.23			
RPM	0	3586.25	3572.5	3558.75	3545	3531.25	3517.5			
Eff	0	89.26	92.45	93.10	92.40	92.40	92.40			
PF	0	64.4	81.4	87.5	90	89.7	89.2			
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	1512	2880	3545	3600	Continuous	1.15	40°C	3,300 ft	89
Current (Amps)	362	307.7	215.4	55	15	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	148.15	125.93	200.01	74.08	0.0	C.T.	2:1	V.T.	10:1	

Motor Speed Data

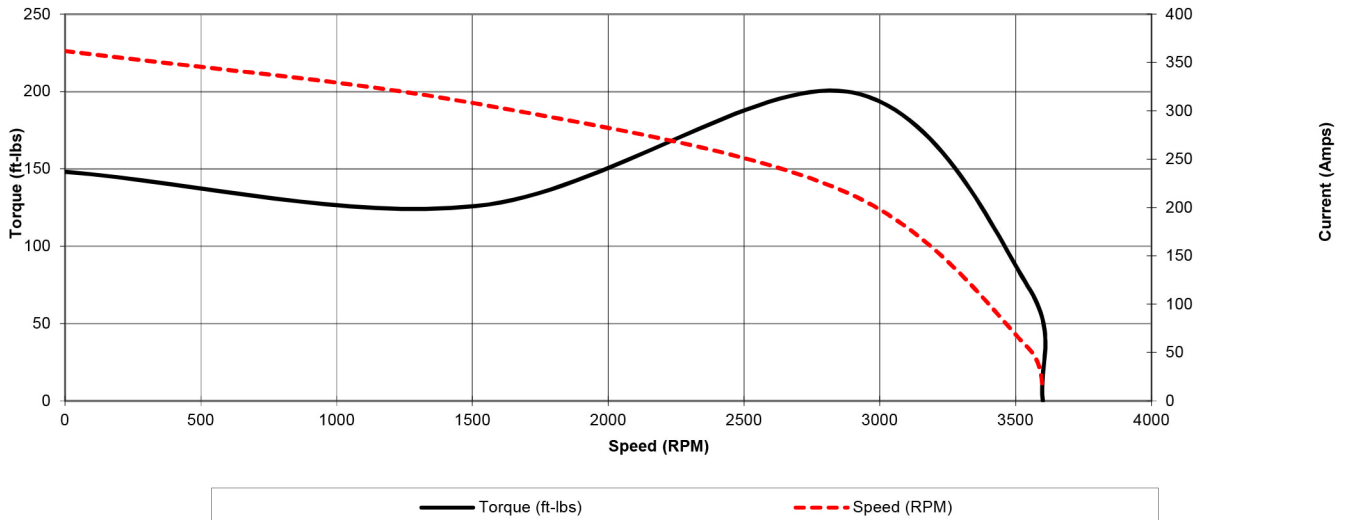

Motor Load Data

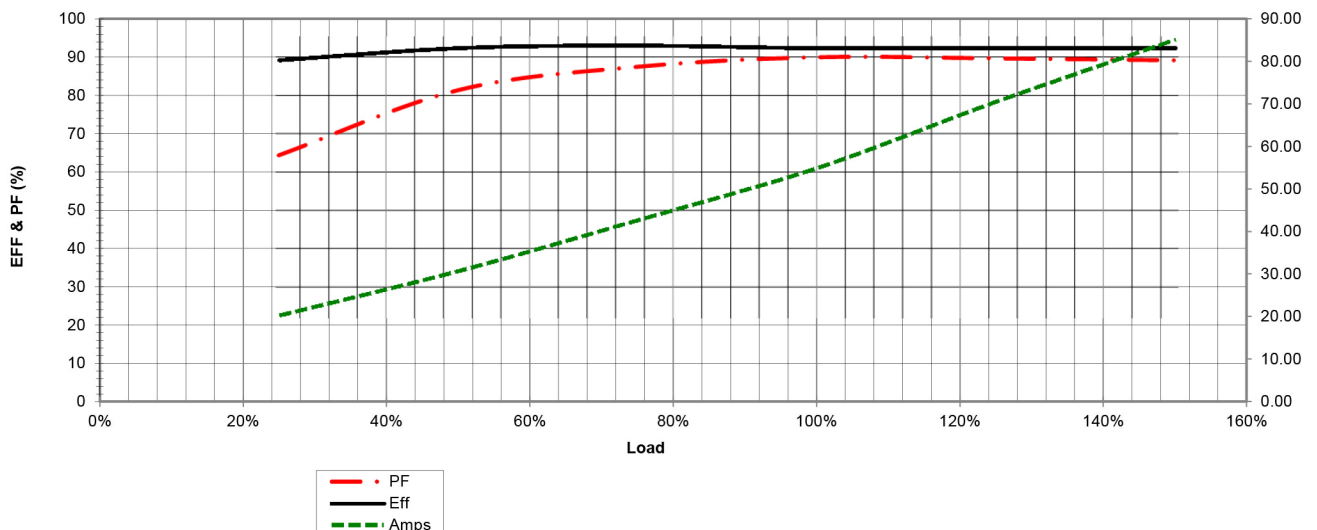

EPACT NR CAN NEMA 12 - 11										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
50	460	3545	TEFC	326JM	60	B	2	G	F	70
	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz
Amps	55	55	55	55	55	55	55	55	55	55
RPM	0	354.5	886.25	1772.5	2658.75	3545	4431.25	5317.5	6203.75	7090
Torq ft.lb	59.26	59.26	74.08	74.08	74.08	74.08	59.26	49.38	42.33	37.04
Peak Tq ft.lb	87.04	174.08	174.08	174.08	174.08	174.08	139.26	116.05	99.47	87.04
HP	0	4.0	12.5	25.0	37.5	50.0	50.0	50.0	50.0	50.0
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0.0	1512	2880	3545	3600	Continuous	1.15	40°C	3,300 ft	89
Current (Amps)	362.0	307.7	215.4	55.0	15.0	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	148.2	125.9	200.0	74.1	0.0	C.T.	2:1	V.T.	10:1	

