



**PERFORMANCE DATA SHEET
NEMA PREMIUM NR CAN NEMA 12 - 12**

Catalogue #: MQOP-81

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
125	93,25	460	1,15	94,1%	0,9	404TS	B	907

60 Hz								Code	F.L. RPM
208	230	416	460	480	575	600			
/	/	/	138,00	/	/			G	3575

50 Hz								
FLA			S.F. @ 50Hz	Efficiency	Power Factor	Code	F.L. RPM	
190	380	415						
/	164		1,00	93,5%	0,920	D	2980	

Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
1247	3	Cont.	F	40°C	1000M (3,300 Ft)	< 80

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	94,1%	Full Load:	0,90	Full Load Ft/Lbs	183,6		
3/4 Load:	93,5%	3/4 Load:	0,88	Locked Rotor %	140		
1/2 Load:	93,0%	1/2 Load:	0,84	Break Down %	250		

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
16,61	145	1045	Cast Iron	Cast Iron	Cast Iron	ODP	IP23	5AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6314	6314	Mobil PolyrexEm	Rigid	Horizontal	RAL6022	92	104

Inverter Duty, Motor meets MG1 parts 31.4.4.2	VFD SF	Constant Torque Range	Variable Torque Range	Constant HP RPM
	1,00	10:1	20:1	5400




Date: 2023-12-13
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée


Catalogue #: MQOP-81

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
125	460	3575	ODP	404TS	60 Hz	B	2	G	F	< 80
	0Hz	6Hz	15Hz	30Hz	45Hz	60 Hz	75Hz	90Hz	105Hz	120Hz
Amps	138	138	138	138	138	138	138	138	138	138
RPM	0	357,5	893,75	1787,5	2681,25	3575	4468,75	5362,5	6256,25	7150
Torq ft.lb	146,91	146,91	183,64	183,64	183,64	183,64	146,91	122,42	104,94	91,82
Peak Tq ft.lb	206,59	413,18	413,18	413,18	413,18	413,18	330,55	275,45	236,10	206,59
HP	0	10,0	31,3	62,5	93,8	125,0	125,0	125,0	125,0	125,0
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0,0	1512	2880	3575	3600	Continuous	1,15	40°C	3,300 ft	92
Current (Amps)	907,0	771,0	539,7	138,0	52,4	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft.-lbs)	257,1	192,8	459,1	183,6	0,0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

Motor Speed Data

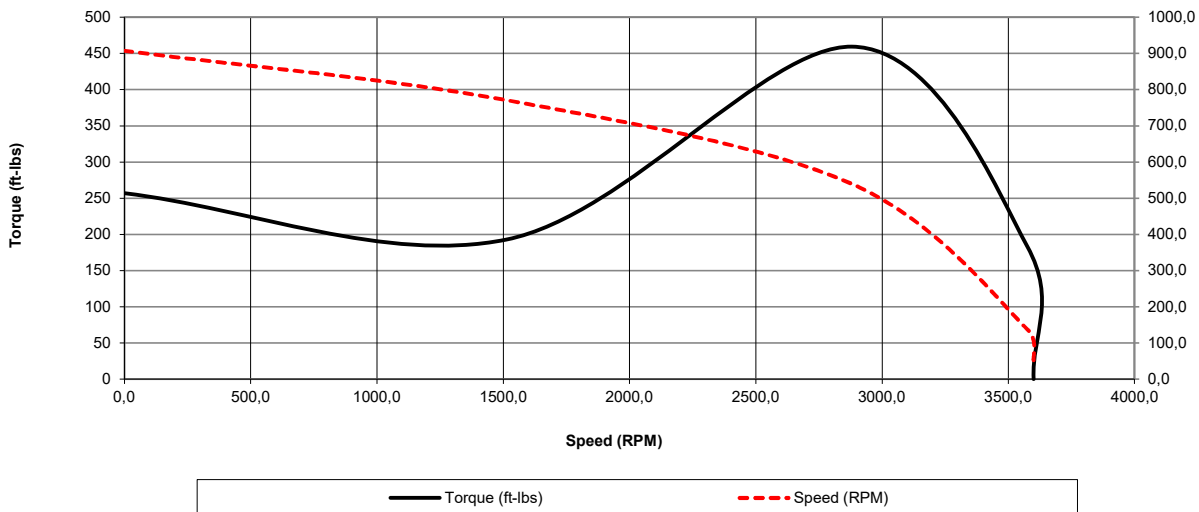

Motor Torque Capability vs RPM

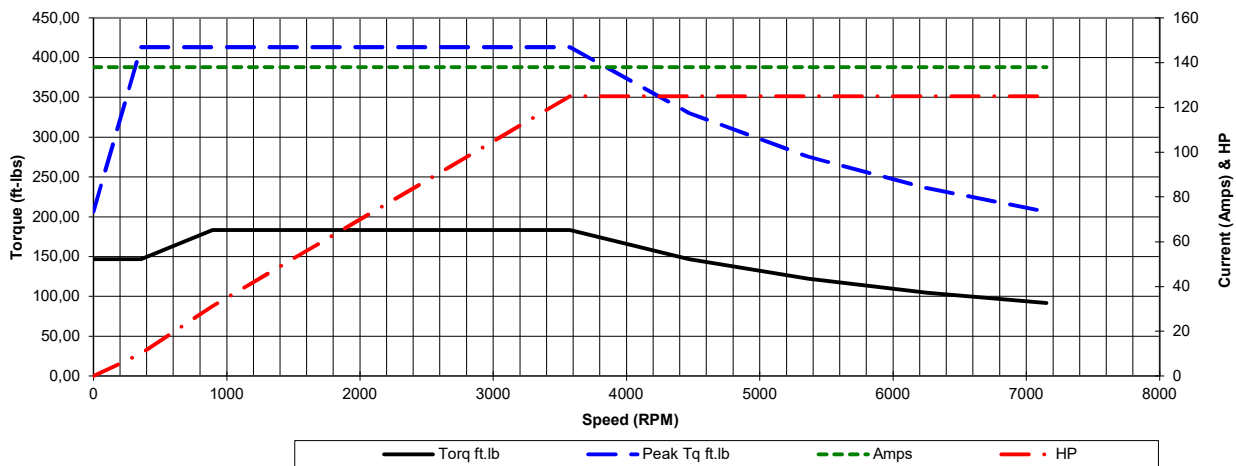



Date: 2023-12-13
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: **MQOP-81**

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
125	460	3575	ODP	404TS	60 Hz	B	2	G	F	< 80
Load %	0%	25%	50%	75%	100%	125%	150%			
Amps	52,44	45,54	81,70	107,78	138,00	173,77	213,58			
Torq ft/lbs	0	45,67	91,50	137,49	183,64	229,95	276,42			
RPM	0	3593,75	3587,5	3581,25	3575	3568,75	3562,5			
Eff	0	90,24	93,00	93,50	94,10	92,62	92,26			
PF	0	71,2	84	88	90	90,9	89,1			
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	1512	2880	3575	3600	Continuous	1,15	40°C	3,300 ft	92
Current (Amps)	907	771,0	539,7	138	52,44	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	257,09	192,82	459,09	183,64	0,0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

