



ELP10P2G

Starting torque and current curves

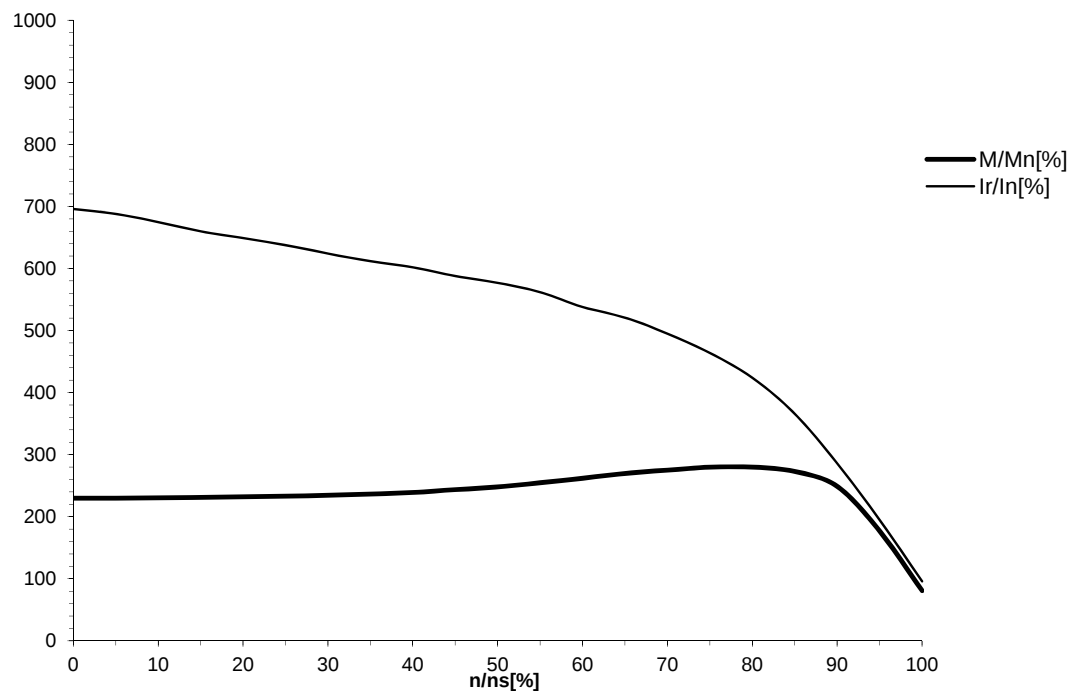


cos

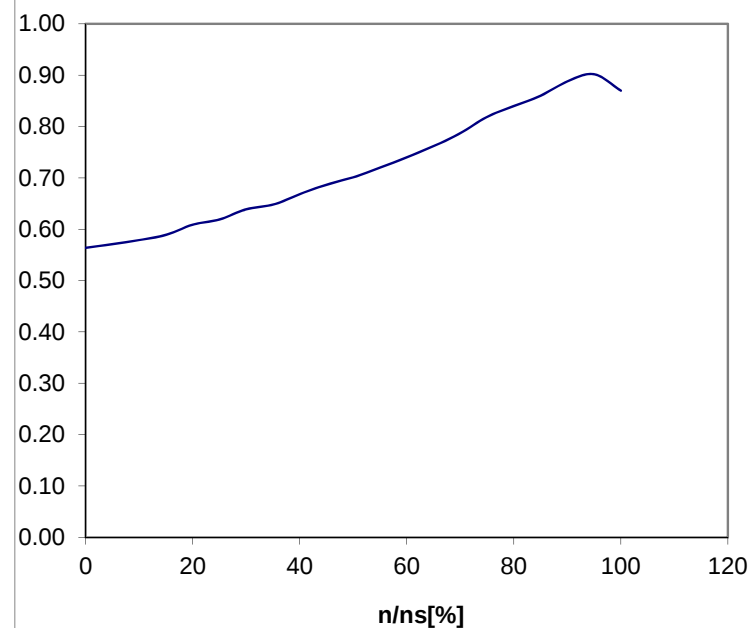

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/In[%]	696	688	675	660	649	638	624	612	602	588	577	562	538	521	495	464	424	366	286	195	96
M/Mn[%]	230	230	231	231	232	233	235	237	239	244	248	255	262	270	275	280	280	273	249	177	81
cos	0.56	0.57	0.58	0.59	0.61	0.62	0.64	0.65	0.67	0.69	0.70	0.72	0.74	0.76	0.79	0.82	0.84	0.86	0.89	0.90	0.87

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP10P2G

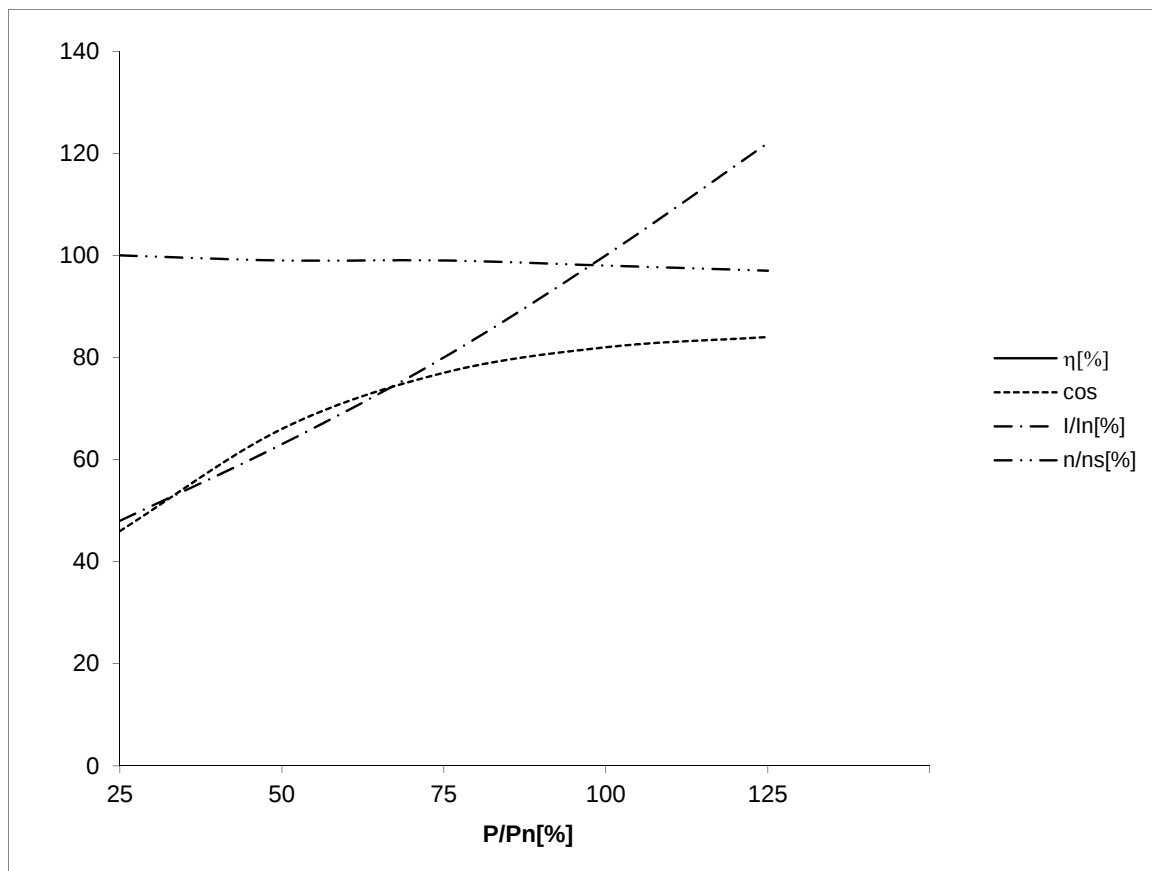

P/Pn[%]	25	50	75	100	125
h[%]	84.0	90.4	91.7	91.7	91.6
cosφ[%]	46	66	77	82	84
I/In[%]	48	63	80	100	122
n/ns[%]	100	99	99	98	97

Disclaimer: These Graph Datas are Typical unless noted otherwise.