



ELP15P3G

Starting torque and current curves

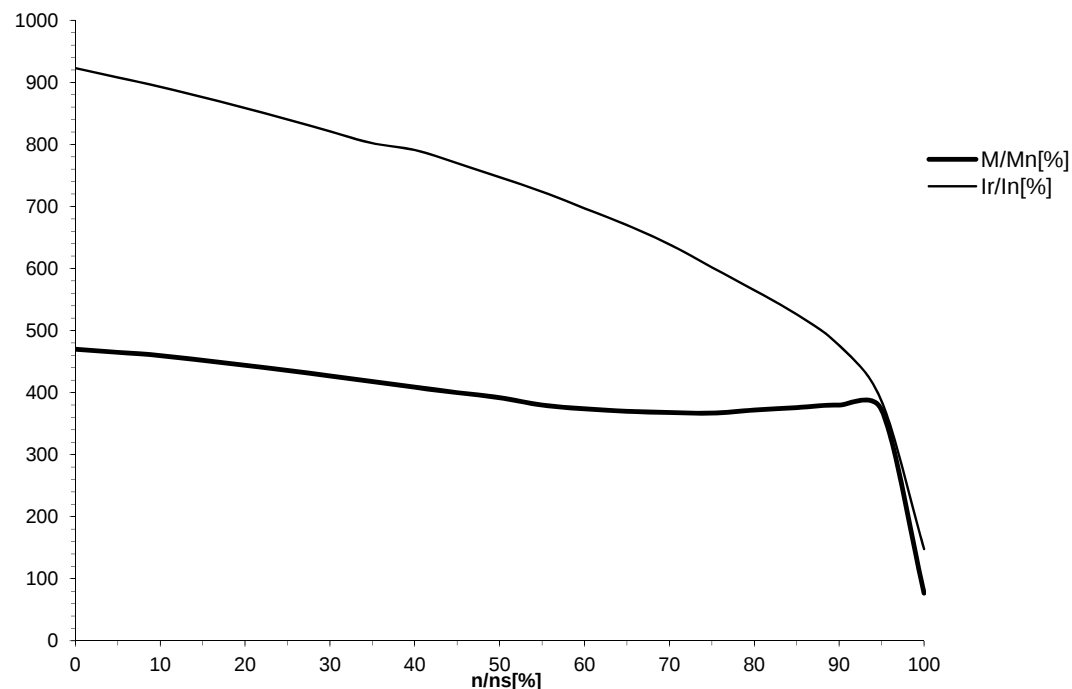


cos

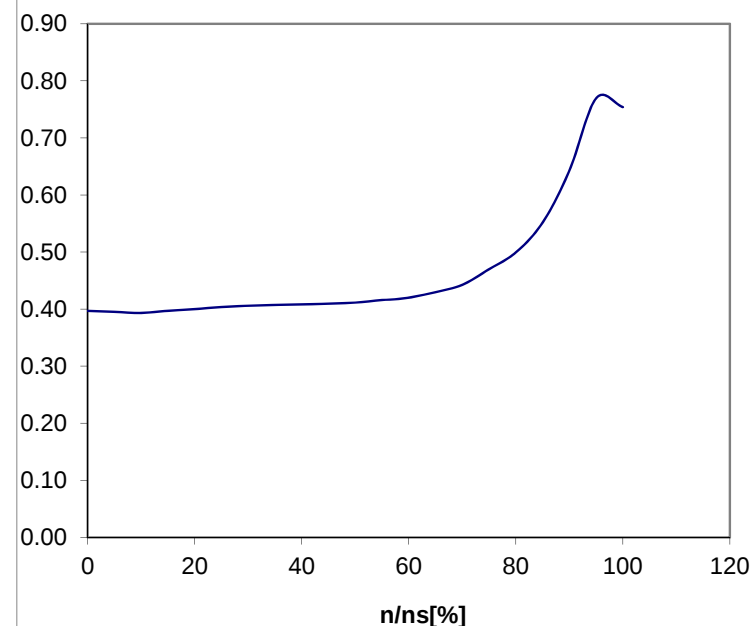

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/In[%]	923	908	893	876	859	840	821	802	791	770	747	724	697	670	639	602	565	526	476	386	148
M/Mn[%]	470	465	460	452	444	436	427	418	409	400	392	380	374	370	368	367	372	376	380	372	77
cos	0.40	0.40	0.39	0.40	0.40	0.40	0.41	0.41	0.41	0.41	0.41	0.42	0.42	0.43	0.44	0.47	0.50	0.55	0.64	0.77	0.75

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP15P3G

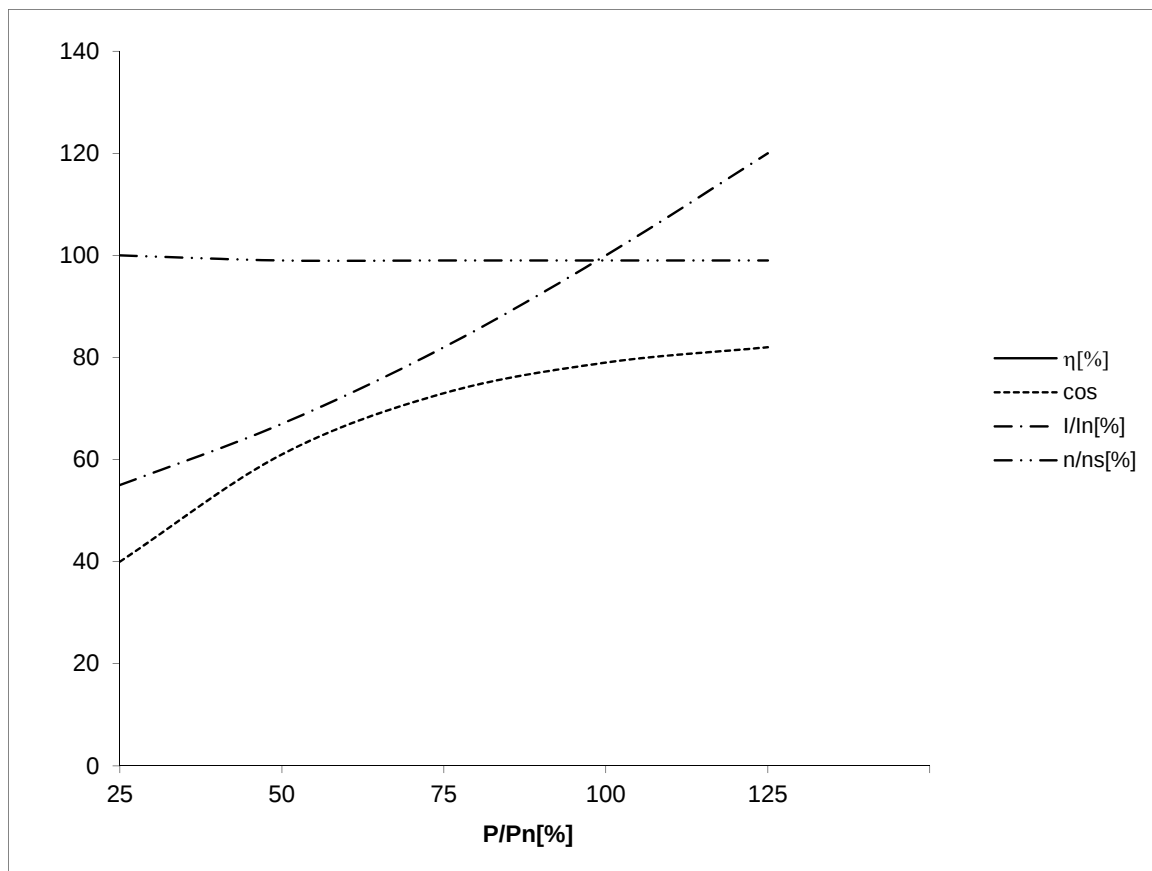

P/Pn[%]	25	50	75	100	125
h[%]	82.0	89.0	91.2	91.7	91.8
cosφ[%]	40	61	73	79	82
I/In[%]	55	67	82	100	120
n/ns[%]	100	99	99	99	99

Disclaimer: These Graph Datas are Typical unless noted otherwise.