



ELP32P1D

Starting torque and current curves

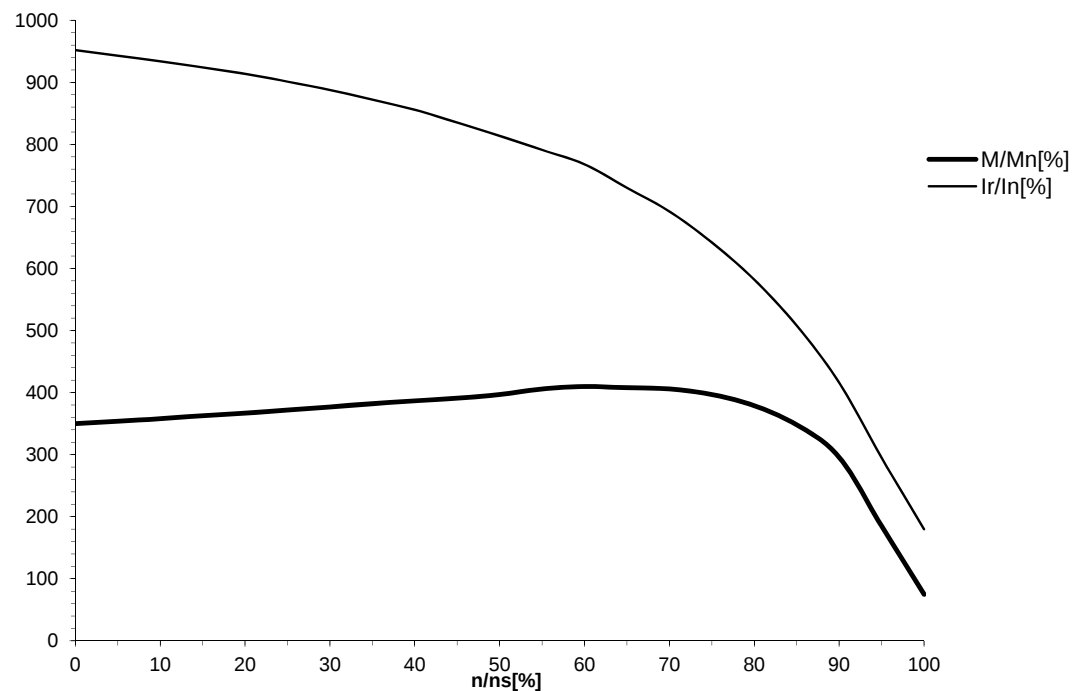


cos

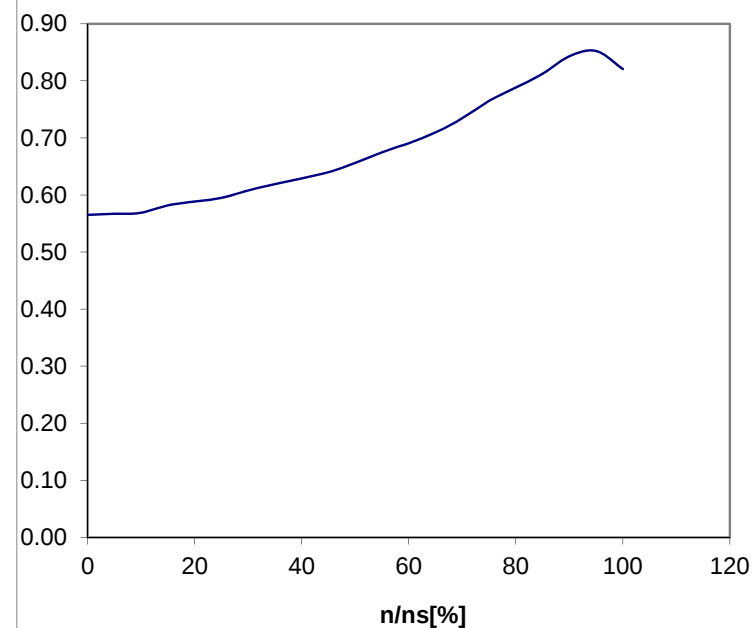

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/In[%]	952	943	934	924	914	901	888	872	856	835	814	791	768	730	692	642	582	508	416	295	180
M/Mn[%]	350	354	358	363	367	372	377	382	387	391	397	406	410	408	406	397	379	348	296	185	75
cos	0.57	0.57	0.57	0.58	0.59	0.59	0.61	0.62	0.63	0.64	0.66	0.67	0.69	0.71	0.73	0.77	0.79	0.81	0.84	0.85	0.82

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP32P1D

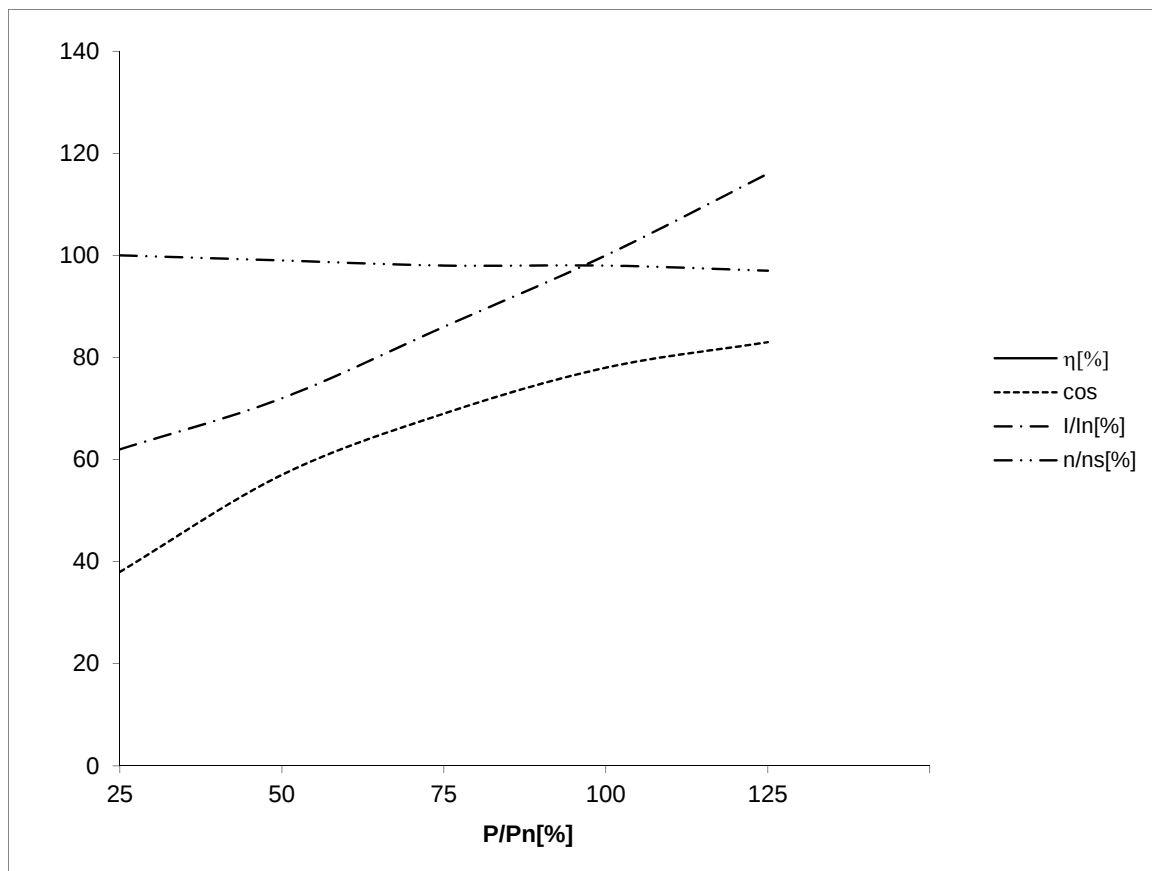

P/Pn[%]	25	50	75	100	125
h[%]	69.0	79.8	83.2	84.0	84.0
cosφ[%]	38	57	69	78	83
I/In[%]	62	72	86	100	116
n/ns[%]	100	99	98	98	97

Disclaimer: These Graph Datas are Typical unless noted otherwise.